


STACKING S 120 H MLR - INDOOR

David Rockwell, 2025

LEUCOS



Discover more

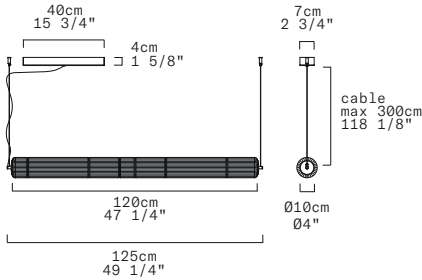

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm L120cm [Ø4" 47 1/4"] Canopy: 40cm x 7cm x H4cm [15 3/4" x 2 3/4" x H1 5/8"] Cable lenght: 300cm [118 1/8"]
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 28,75W (total) 3306 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 28,75W (total) 3162 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	 
NET WEIGHT	7,1 Kg
ACCESSORIES	Radial Cluster Canopy 33



 Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
[5] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014626 0014627
[6] Trasparent Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014628 0014629

 Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
[5] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014646 0014647
[6] Trasparent Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014648 0014649

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information