


STACKING S 180 H MLR - INDOOR

David Rockwell, 2025


LEUCOS

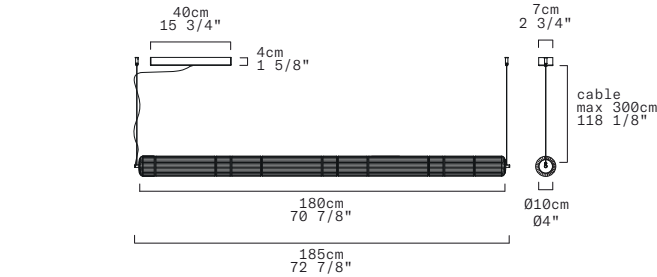

Discover more

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm L180cm [Ø4" 70 7/8"] Canopy: 40cm x 7cm x H4cm [15 3/4" x 2 3/4" x H1 5/8"] Cable lenght: 300cm [118 1/8"]
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 43,75W (total) 5031 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 43,75W (total) 4812 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	CE IP20
NET WEIGHT	12,3 Kg
ACCESSORIES	Radial Cluster Canopy 33

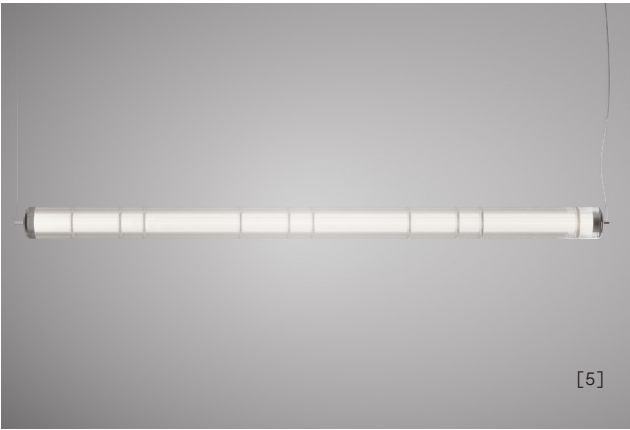

Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
[5] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014622 0014623
[6] Trasparent Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014624 0014625

Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
[5] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014642 0014643
[6] Trasparent Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014644 0014645

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information