


STACKING S 60 V RIG VU - INDOOR

David Rockwell, 2025

LEUCOS

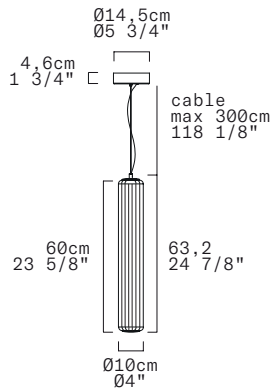

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Rigadin Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm H60cm [Ø4" 23 5/8"] Canopy: Ø14,5cm H4,6cm [Ø5 3/4" 1 3/4"] Cable lenght: 300cm [118 1/8"]
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 13,75W (total) 1581 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 13,75W (total) 1512 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	CE IP 20
NET WEIGHT	3,2kg
ACCESSORIES	Round Cluster Canopy 55 Radial Cluster Canopy 33



[3]

Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
[3] Trasparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014499 0014501
[4] Trasparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0014503 0014504

Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
[3] Trasparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014539 0014540
[4] Trasparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0014543 0014544

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information