


STACKING S 90 V MLR - INDOOR

David Rockwell, 2024

LEUCOS

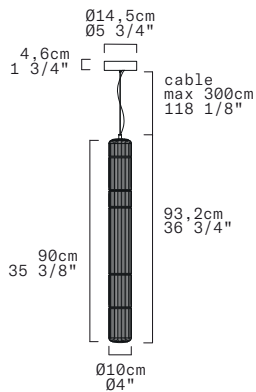

REPLACEABLE LED

| TECHNICAL SHEET  |                                                                                                                                    |
|------------------|------------------------------------------------------------------------------------------------------------------------------------|
| MATERIALS        | Diffuser: Millerighe Borosilicate Glass<br>Structure: Aluminum                                                                     |
| DIMENSIONS       | Diffuser: Ø10cm H90cm [Ø4" 35 3/8"]<br>Canopy: Ø14,5cm H4,6cm [Ø5 3/4" H1 3/4"]<br>Cable lenght: 300cm [118 1/8"]                  |
| CANOPY           | Matte white                                                                                                                        |
| LIGHT SOURCE     | 5 X LED STRIP 24V 21,25W (total) 2443 lm (nominal) 3000K CRI≥90<br>5 X LED STRIP 24V 21,25W (total) 2337 lm (nominal) 2700K CRI≥90 |
| DIMMING PROTOCOL | Push-dim; 0/1-10V, DALI                                                                                                            |
| MARKING          | CE IP20                                                                                                                            |
| NET WEIGHT       | 5,4kg                                                                                                                              |
| ACCESSORIES      | Round Cluster Canopy 55<br>Radial Cluster Canopy 33                                                                                |



[5]

Standard version (supplied with canopy & driver)

| DIMMING PROTOCOL                                 | Push-dim; 0/1-10V, DALI |                    |
|--------------------------------------------------|-------------------------|--------------------|
| FINISH (DIFFUSER + STRUCTURE)                    | SOURCE                  | CODE               |
| [5] Trasparent Millerighe + Anodized Aluminum    | LED 3000K<br>LED 2700K  | 0014610<br>0014611 |
| [6] Trasparent Millerighe + Matte Black Aluminum | LED 3000K<br>LED 2700K  | 0014612<br>0014613 |

Class 3 version installation with remote driver (supplied without canopy & driver)

| DIMMING PROTOCOL                                 | Driver and canopy not included |                    |
|--------------------------------------------------|--------------------------------|--------------------|
| FINISH (DIFFUSER + STRUCTURE)                    | SOURCE                         | CODE               |
| [5] Trasparent Millerighe + Anodized Aluminum    | LED 3000K<br>LED 2700K         | 0014630<br>0014631 |
| [6] Trasparent Millerighe + Matte Black Aluminum | LED 3000K<br>LED 2700K         | 0014632<br>0014633 |

We reserve the right to change our product specifications.  
Please visit [www.leucos.com](http://www.leucos.com) for the latest product information