

# LEUCOS

CATALOG  
2026


# YOU SPOT IT FROM AFAR

CATALOG

( 2026 )

EU  
160

Rooted in a solid industrial heritage, from photography with MANFROTTO to retail design with ALU, we reinvent across time: **LEUCOS**, you spot it from afar.

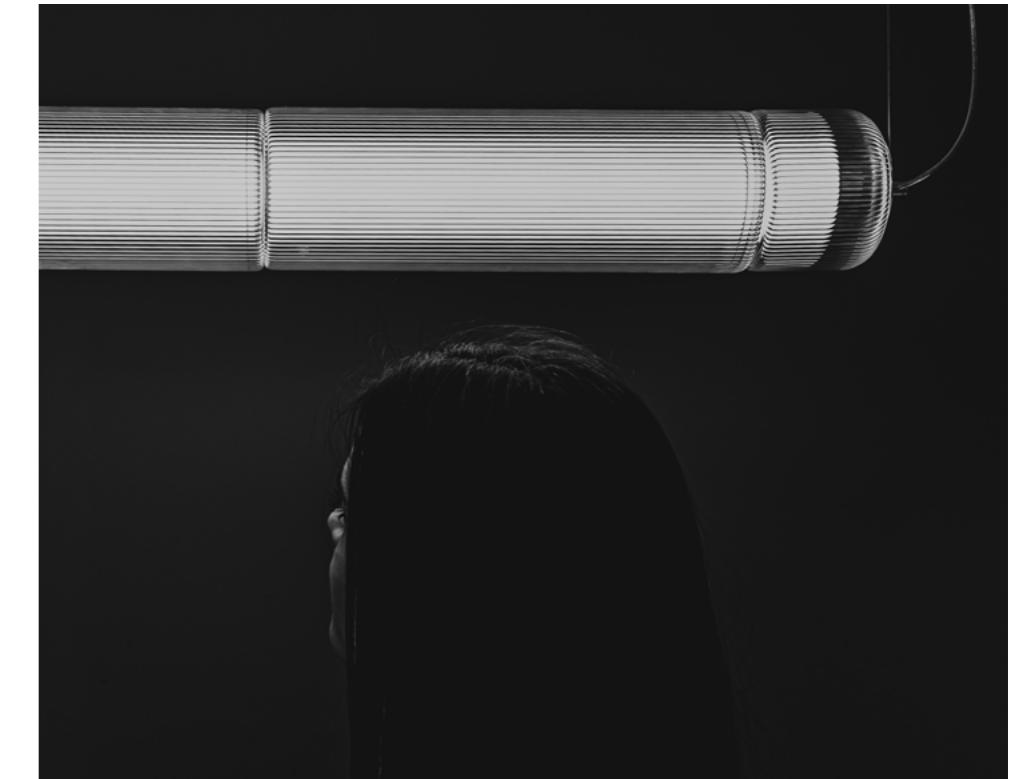

Founded in 1962, the company has always celebrated the excellence of Venetian blown glass, reinterpreting it in a contemporary way through collaborations with internationally renowned designers.

**Today, LEUCOS continues to push the boundaries of contemporary lighting design, offering both highly customizable standard products and fully tailored solutions.**

Beyond Glass. A Future of Innovation.

The rebirth of LEUCOS is rooted in a unique industrial journey, which originates from the renowned Manfrotto company, a global leader in the design and production of professional camera supports and lighting systems, and from ALU, a company specializing in modular and custom display solutions for the most prestigious retailers and global brands.


In 2019, the acquisition of the LEUCOS brand by Abramo Manfrotto marked a turning point, blending advanced technical expertise with a contemporary design vision. The result is a portfolio of collections that alternates classic and modern, craftsmanship and technology, offering functional and durable products that engage with contemporary spaces.



«My childhood memories led me to discover the timeless beauty of LEUCOS. Falling in love with the brand's history and classic icons sparked a passion in me to modernize its portfolio and bring new life to its timeless classics.»

«I have always known that one day I would focus on lighting because, since I was a child, I've been immersed in lighting: balanced and sublime professional photographic lighting.»

— Abramo Manfrotto

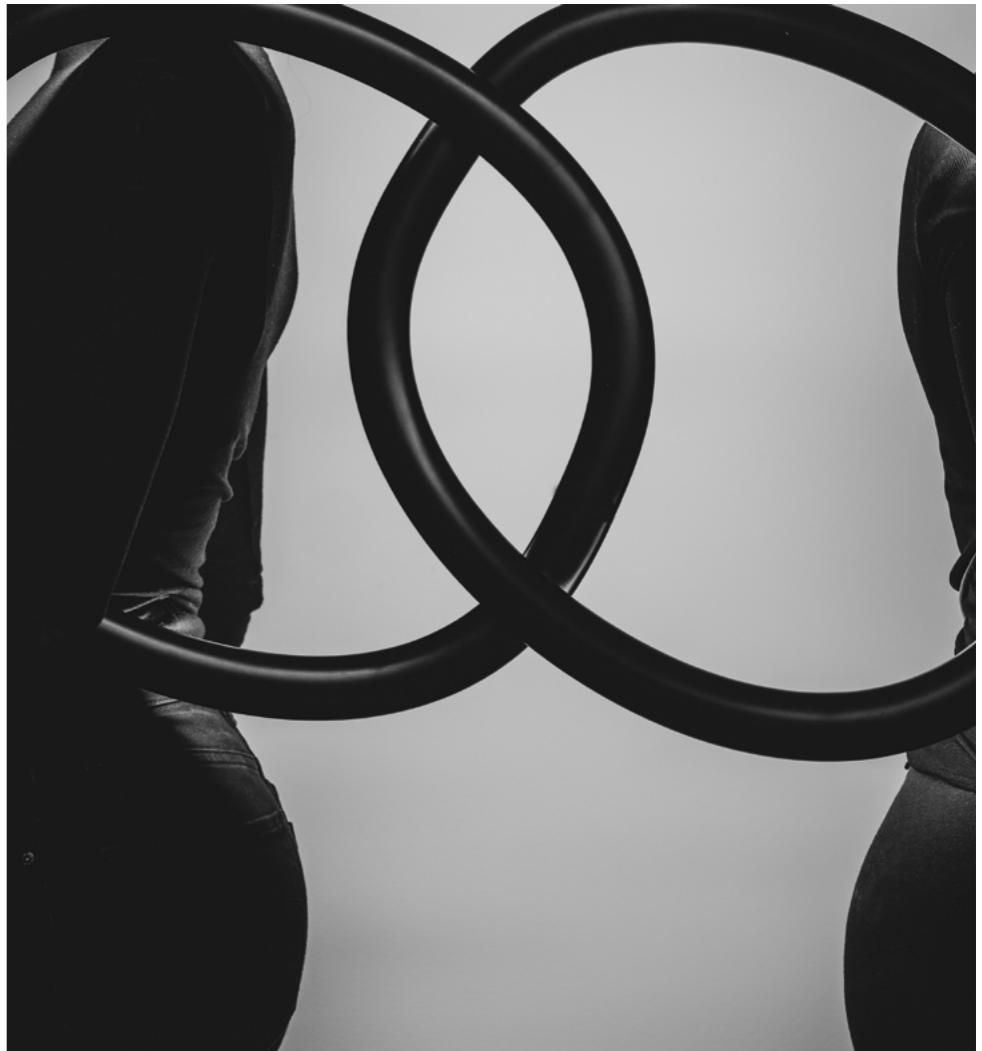

## NEVER THE SAME GLASS PIECE

LEUCOS glass lamps are distinguished by their hand-blown glass diffusers. Their colors and shades are always distinctive, ensuring each piece is original and never identical to another.



For the Transparent with White Spot finish, during the initial phase of blowing, the Maestro glassmaker applies a small amount of white opaline glass—known as "in paste"—onto the still-incandescent transparent glass mass. This paste is fused with the main body of the glass, becoming an integral part of the diffuser.

The glass is then blown and shaped using traditional tools, while rotating the molten mass on a metal plate to achieve the desired form.

The position, size, and intensity of the spot depend on the gesture and sensitivity of the Maestro, making each piece truly one-of-a-kind.

# LEUCOS CATALOG 2026

( COLLECTIONS )

Combining the timeless charm of glass with innovative structural elements, LEUCOS introduces new collections and additions to the existing ones.

( INFO )

Begin with emotion. The catalog opens with a visual journey through all LEUCOS collections—from the new Stripe, OR and Glassdome, to upgraded Stacking and Ether. Technical specifications are detailed at the end.

LEUCOS

# Stripe OR Glassdome Aella Stacking Aurelia Ether

(12) (93)

(28) (99)

(36) (101)

(42) (103)

UPGRADED (56) (110)

(74) (127)

UPGRADED (84) (130)


## TECHNICAL OVERVIEW (92)

# JJ

(137) (148)

# DETAILED PRODUCT INDEX

A complete visual overview of all products included in the catalog, arranged by category and alphabetical order. Page numbers correspond to the order of appearance in the catalog (technical sheets in round brackets).

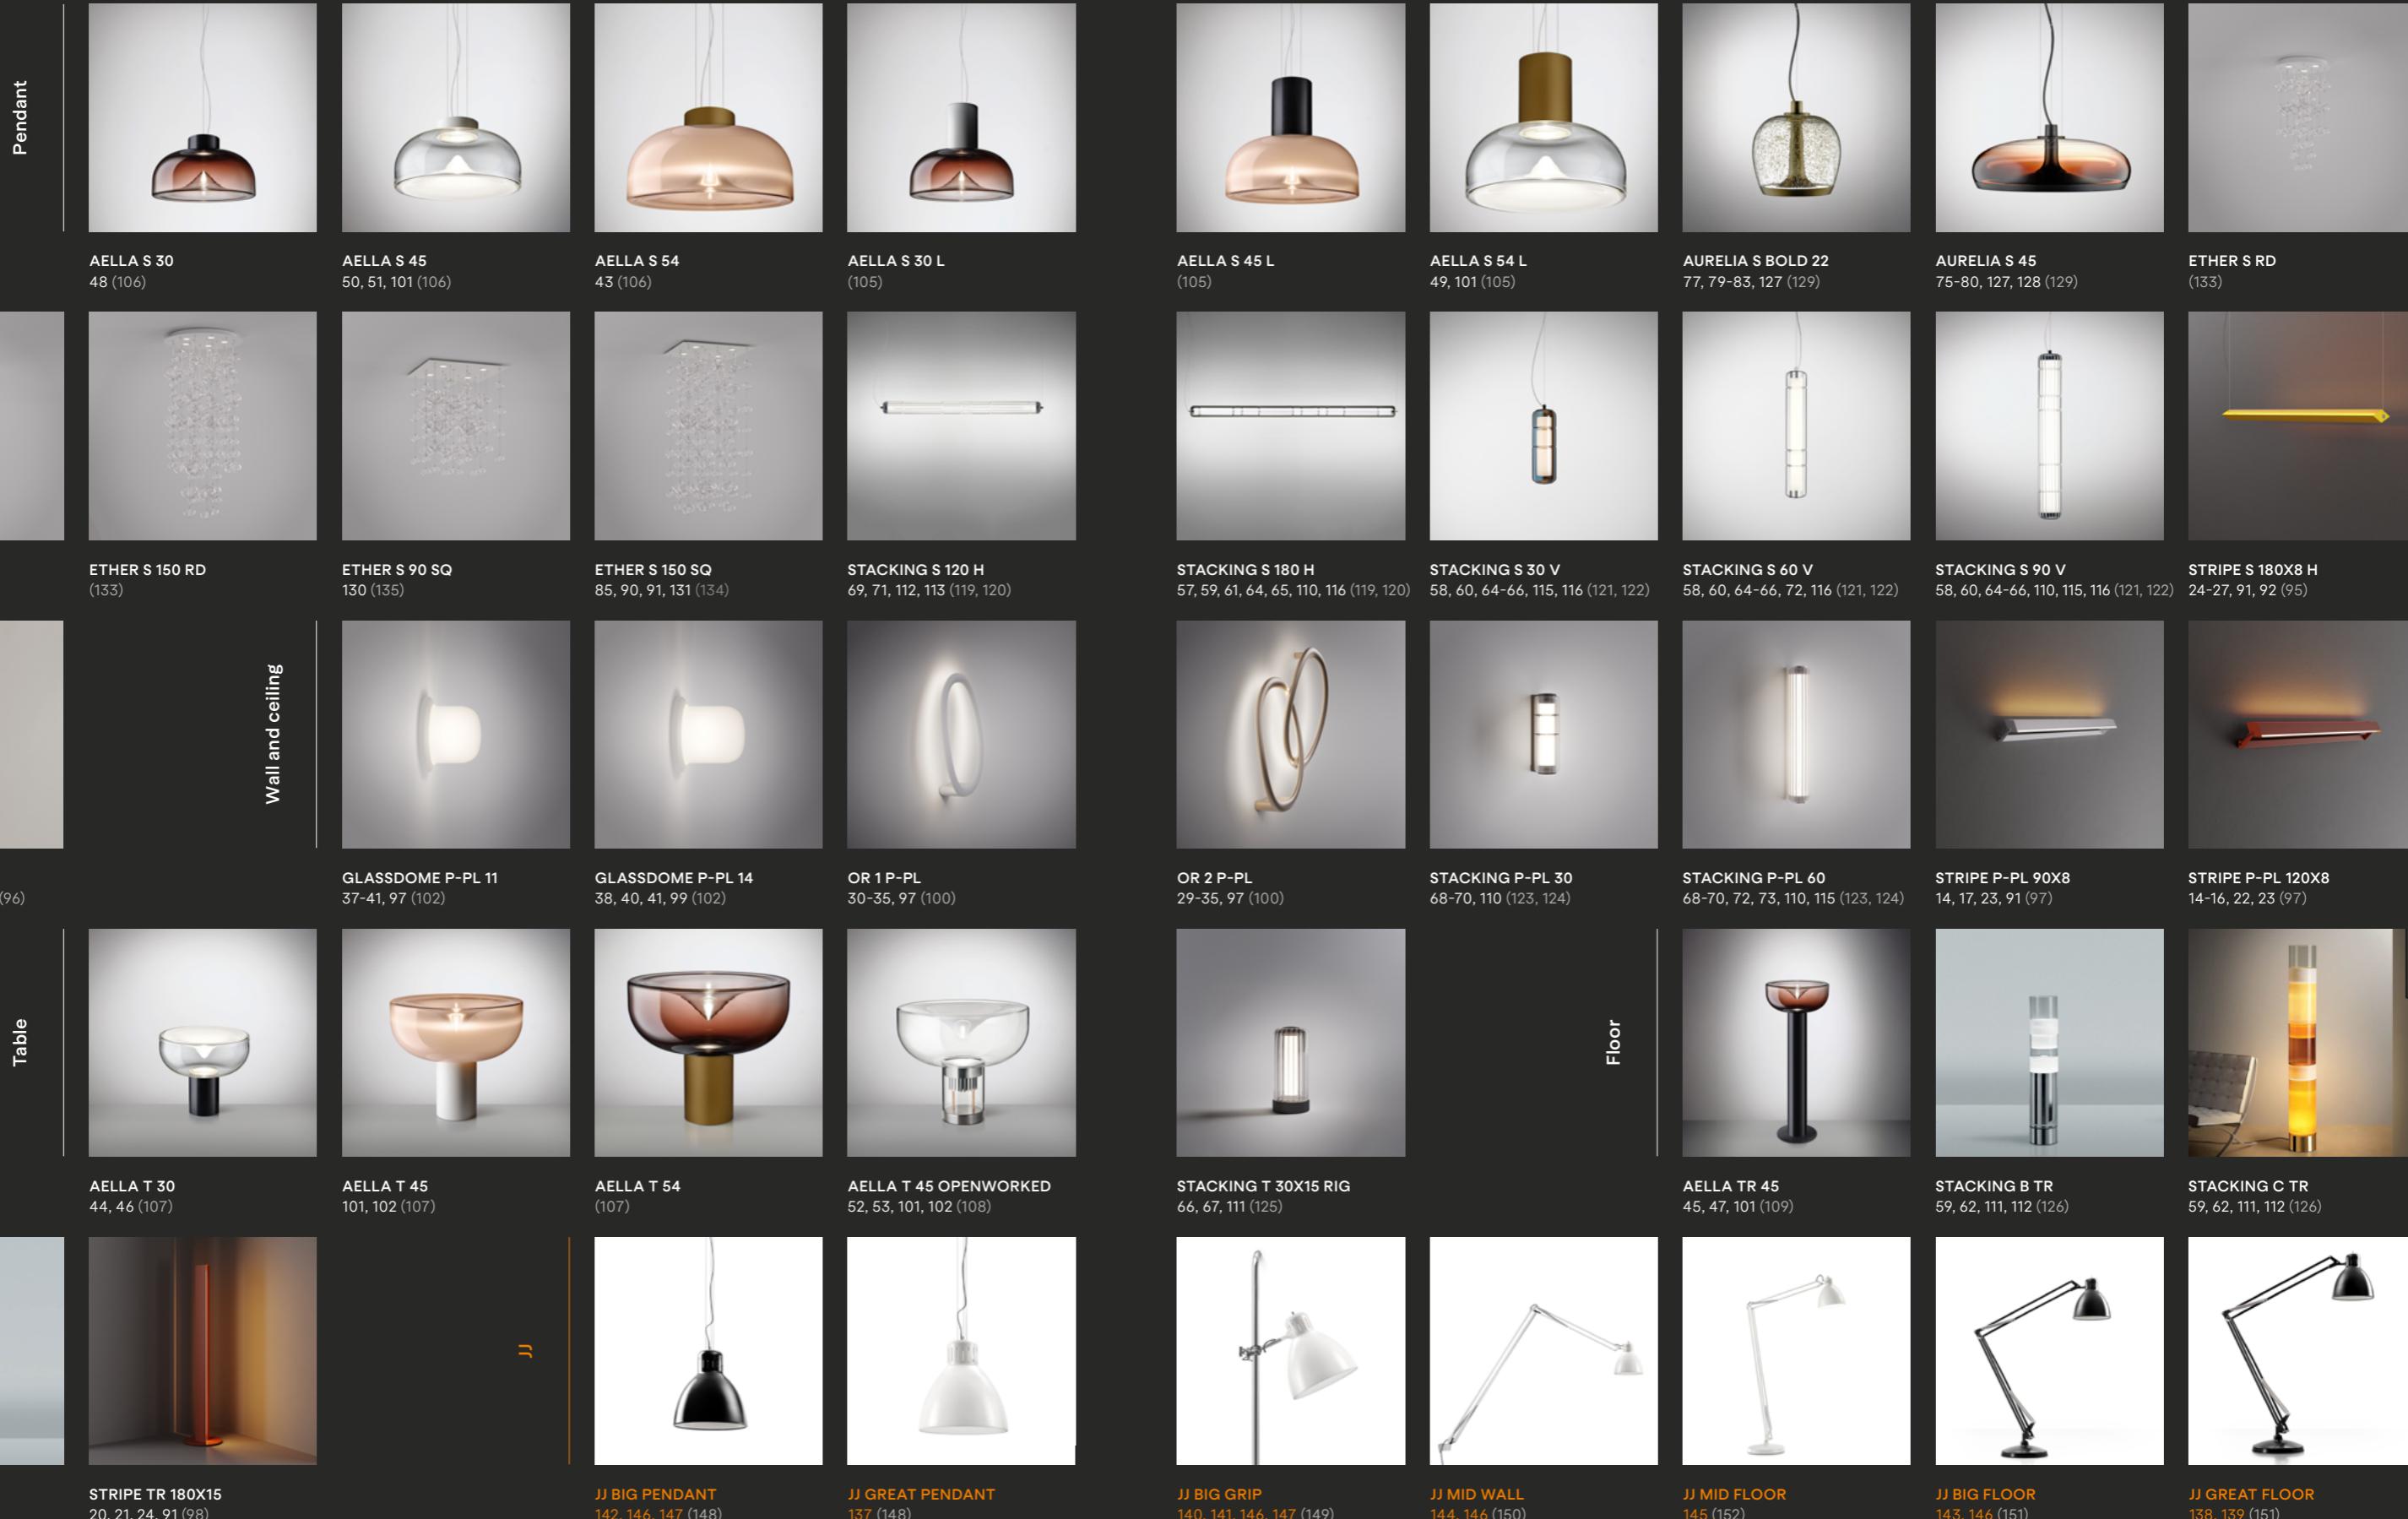

# Stripe

A minimalist metal structure that transforms space through reflections, rotations, and the poetry of light.


Mayice Studio, 2025.

PENDANT  
PENDANT COUNTERWEIGHT  
WALL AND CEILING  
FLOOR



STRIPE S 120X8 CWT  
Pendant counterweight, indoor.  
Brushed stainless steel.

Stripe's clean silhouette, featuring a diamond-shaped section and available in stainless steel or painted metal finishes, seamlessly integrates into walls, ceilings, and floors.

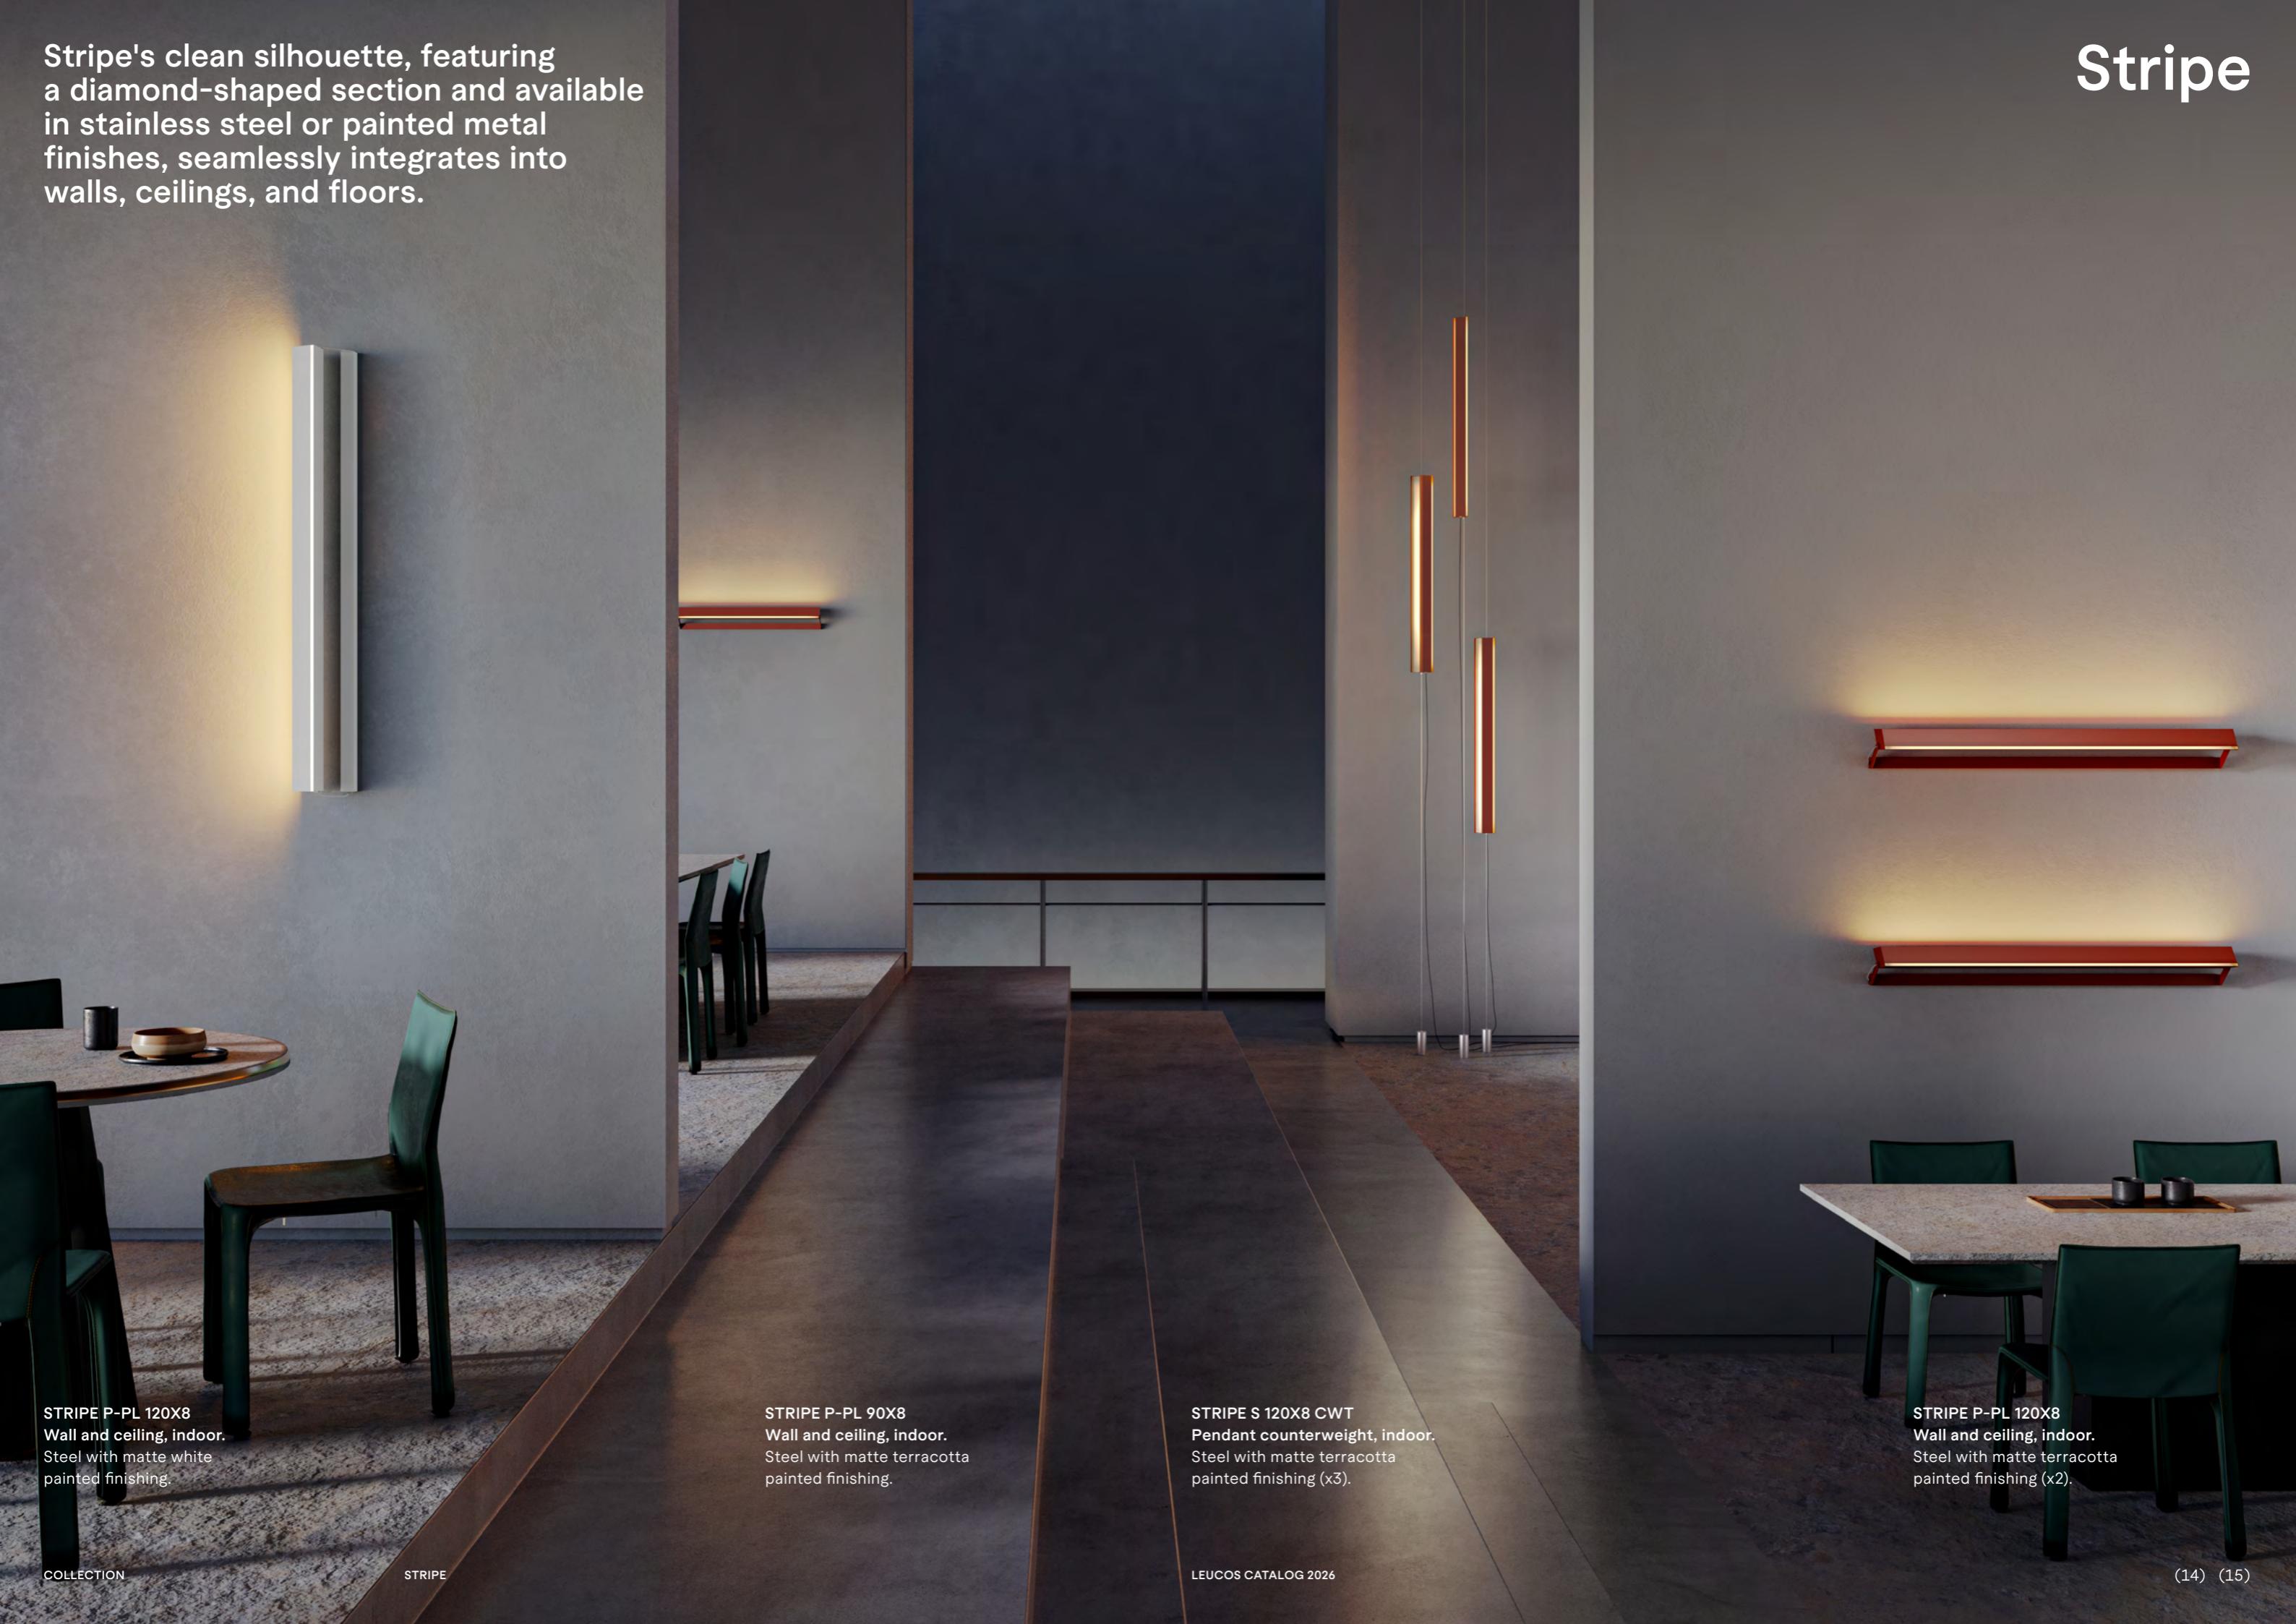

**STRIPE P-PL 120X8**  
Wall and ceiling, indoor.  
Steel with matte white  
painted finishing.

**STRIPE P-PL 90X8**  
Wall and ceiling, indoor.  
Steel with matte terracotta  
painted finishing.

**STRIPE S 120X8 CWT**  
Pendant counterweight, indoor.  
Steel with matte terracotta  
painted finishing (x3).


**STRIPE P-PL 120X8**  
Wall and ceiling, indoor.  
Steel with matte terracotta  
painted finishing (x2).

«With Stripe, we wanted to create a design that captures the ever-changing nature of light.»

—  
Mayice Studio



Stripe is the first LEUCOS collection without glass, exploring the dialogue between light and metal.

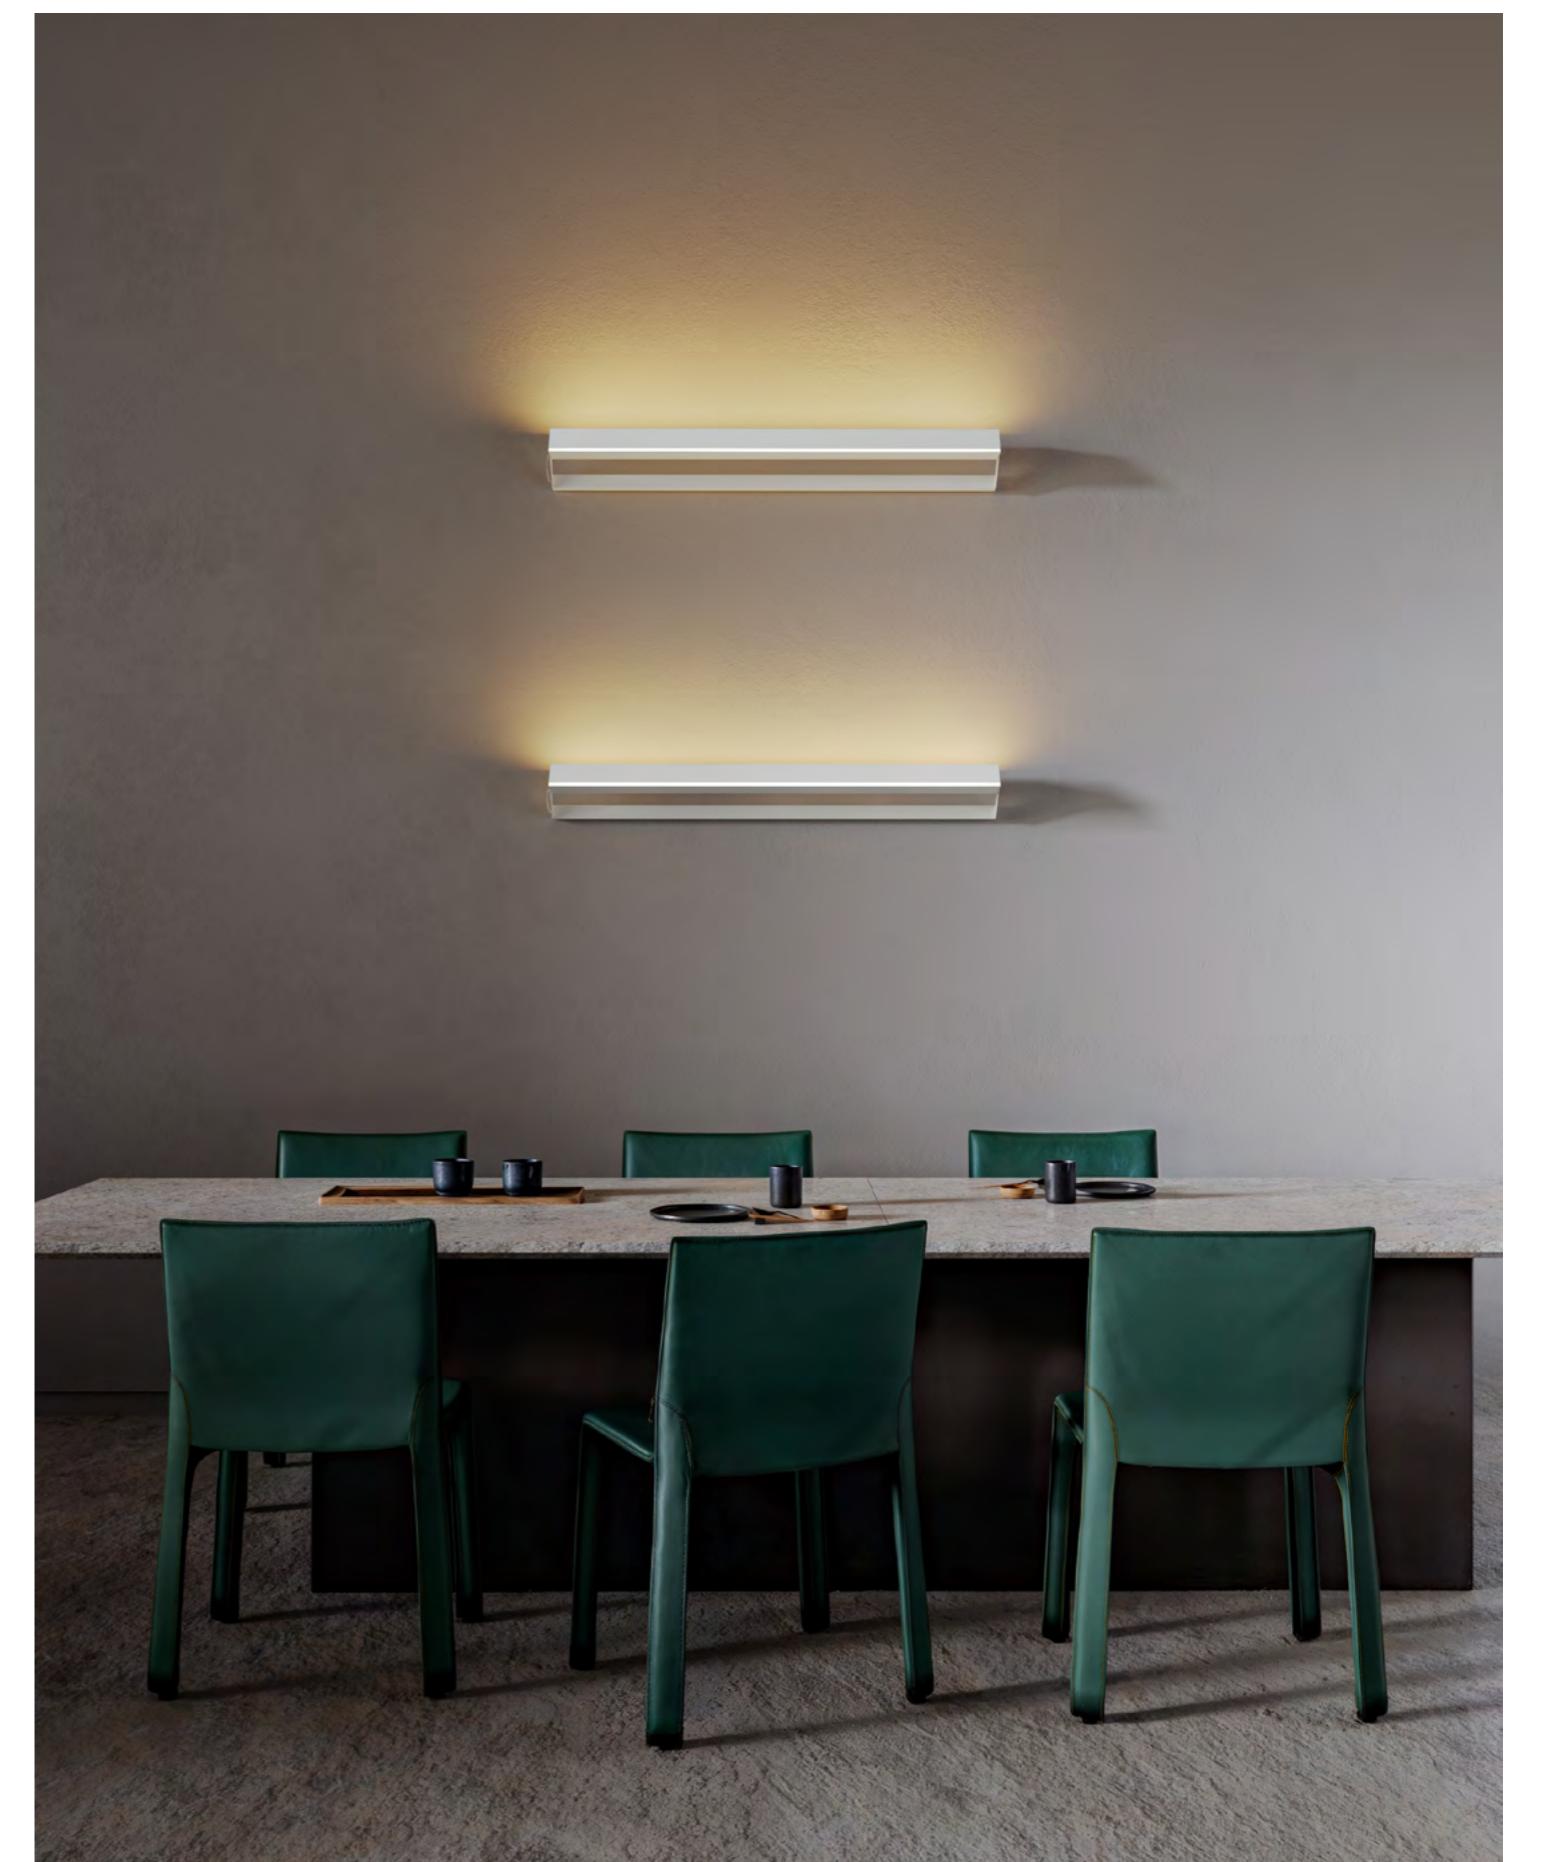

**STRIPE P-PL 90X8**  
Wall and ceiling, indoor.  
Steel with matte white  
painted finishing (x2).



The brushed stainless steel finish enhances the light effect, reflecting and diffusing it in multiple directions, creating luminous paths that expand throughout the space.

**STRIPE S 120X8 CWT**  
Pendant counterweight, indoor.  
Brushed stainless steel (x6).



**STRIPE S 120X8 CWT**  
Pendant counterweight, indoor.  
Steel with matte terracotta  
painted finishing.

→ **STRIPE TR 180X15**  
Floor, indoor.  
Brushed stainless steel.



**STRIPE TR 180X15**  
Floor, indoor.  
Steel with matte terracotta  
painted finishing.





**STRIPE P-PL 120X8**  
Wall and ceiling, indoor.  
Steel with matte terracotta  
painted finishing.

**STRIPE S 120X8 CWT**  
Pendant counterweight, indoor.  
Steel with matte terracotta  
painted finishing.




**STRIPE P-PL 90X8**  
Wall and ceiling, indoor.  
Steel with matte yellow  
painted finishing (x2).



**STRIPE TR 180X15**  
Floor, indoor.  
Steel with matte terracotta  
painted finishing.

**STRIPE S 180X8 H**  
Pendant, indoor.  
Steel with matte yellow  
painted finishing (x2).

In the Suspension version, the metal body can rotate on itself, adding another layer of interaction and flexibility to its luminous presence.

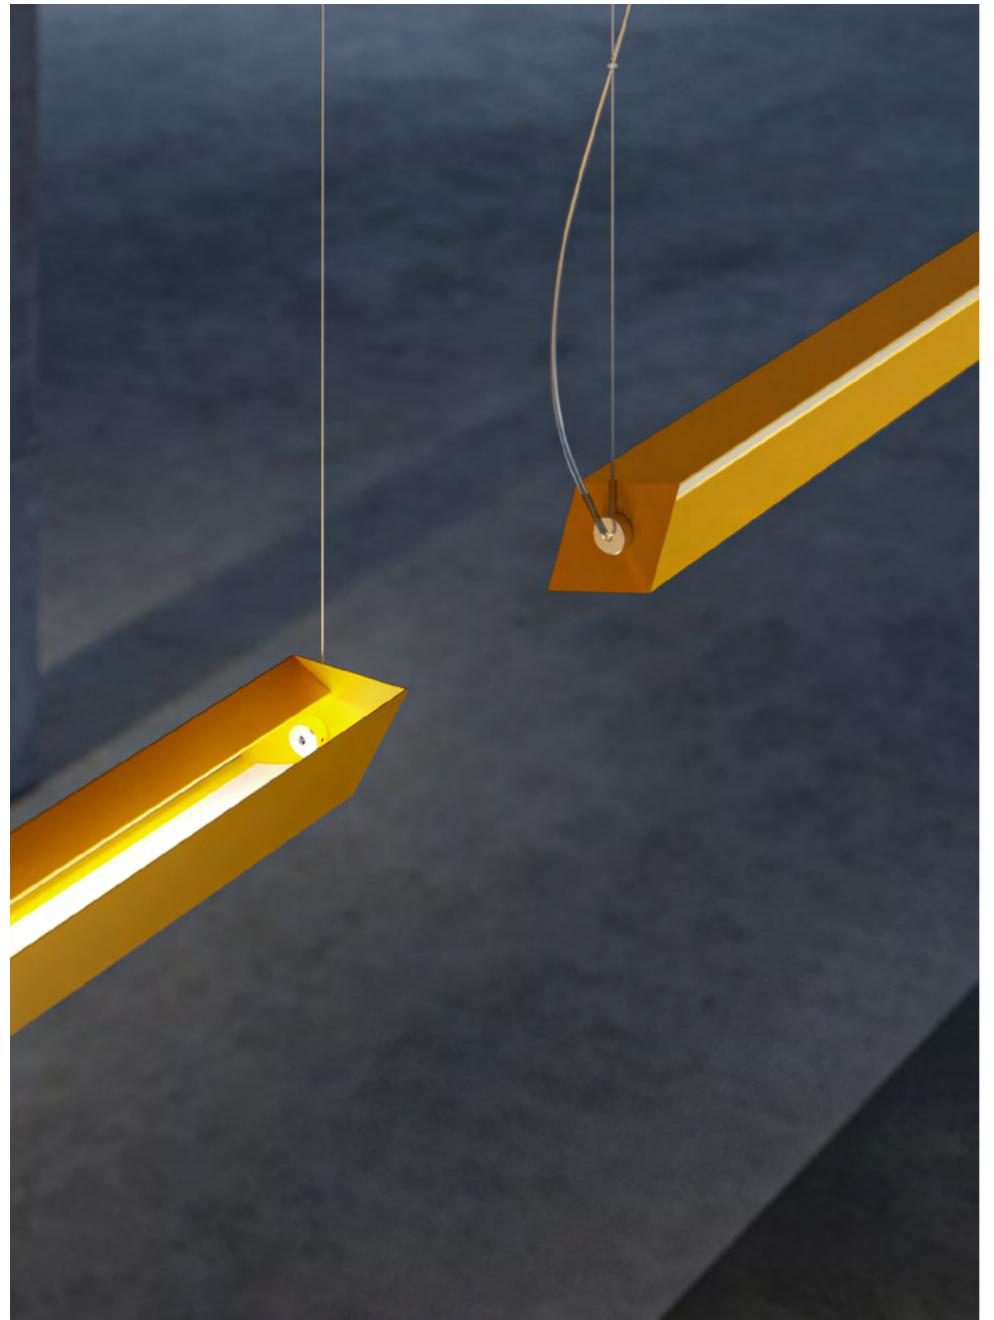

Learn more about the rotatable metal body of Stripe in the technical overview (p. 94, 96).



**STRIPE S 180X8 H**  
Pendant, indoor.  
Steel with matte white  
painted finishing.

More than just a lamp, Stripe explores the dialogue between light and metal, transforming the environment through constantly evolving reflections.

# OR

OR is a luminous line, a game of overlapping, intersecting, and interlocking rings.

Patrick Jouin, 2025.

WALL AND CEILING

**OR 2 P-PL**  
Wall and ceiling, indoor.  
Champagne liquid-painted  
finish.

LEUCOS CATALOG 2026



(28) (29)

OR


Viewed from the front, it appears as a bold, pure line. In motion, perception shifts—depth emerges, the rings separate and slide into one another.



**OR 2 P-PL**  
Wall and ceiling, indoor.  
Champagne liquid-painted  
finish.




**OR 1 P-PL**  
Wall and ceiling, indoor.  
Matte white liquid-painted  
finish (x4).

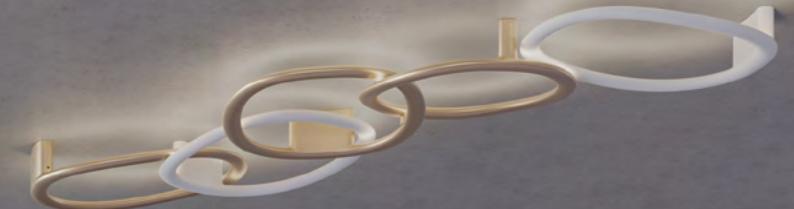

**OR 1 P-PL**  
Wall and ceiling, indoor.  
Champagne (x1) and matte white (x2)  
liquid-painted finish.



**OR 2 P-PL**  
Wall and ceiling, indoor.  
Champagne liquid-painted  
finish (x1).

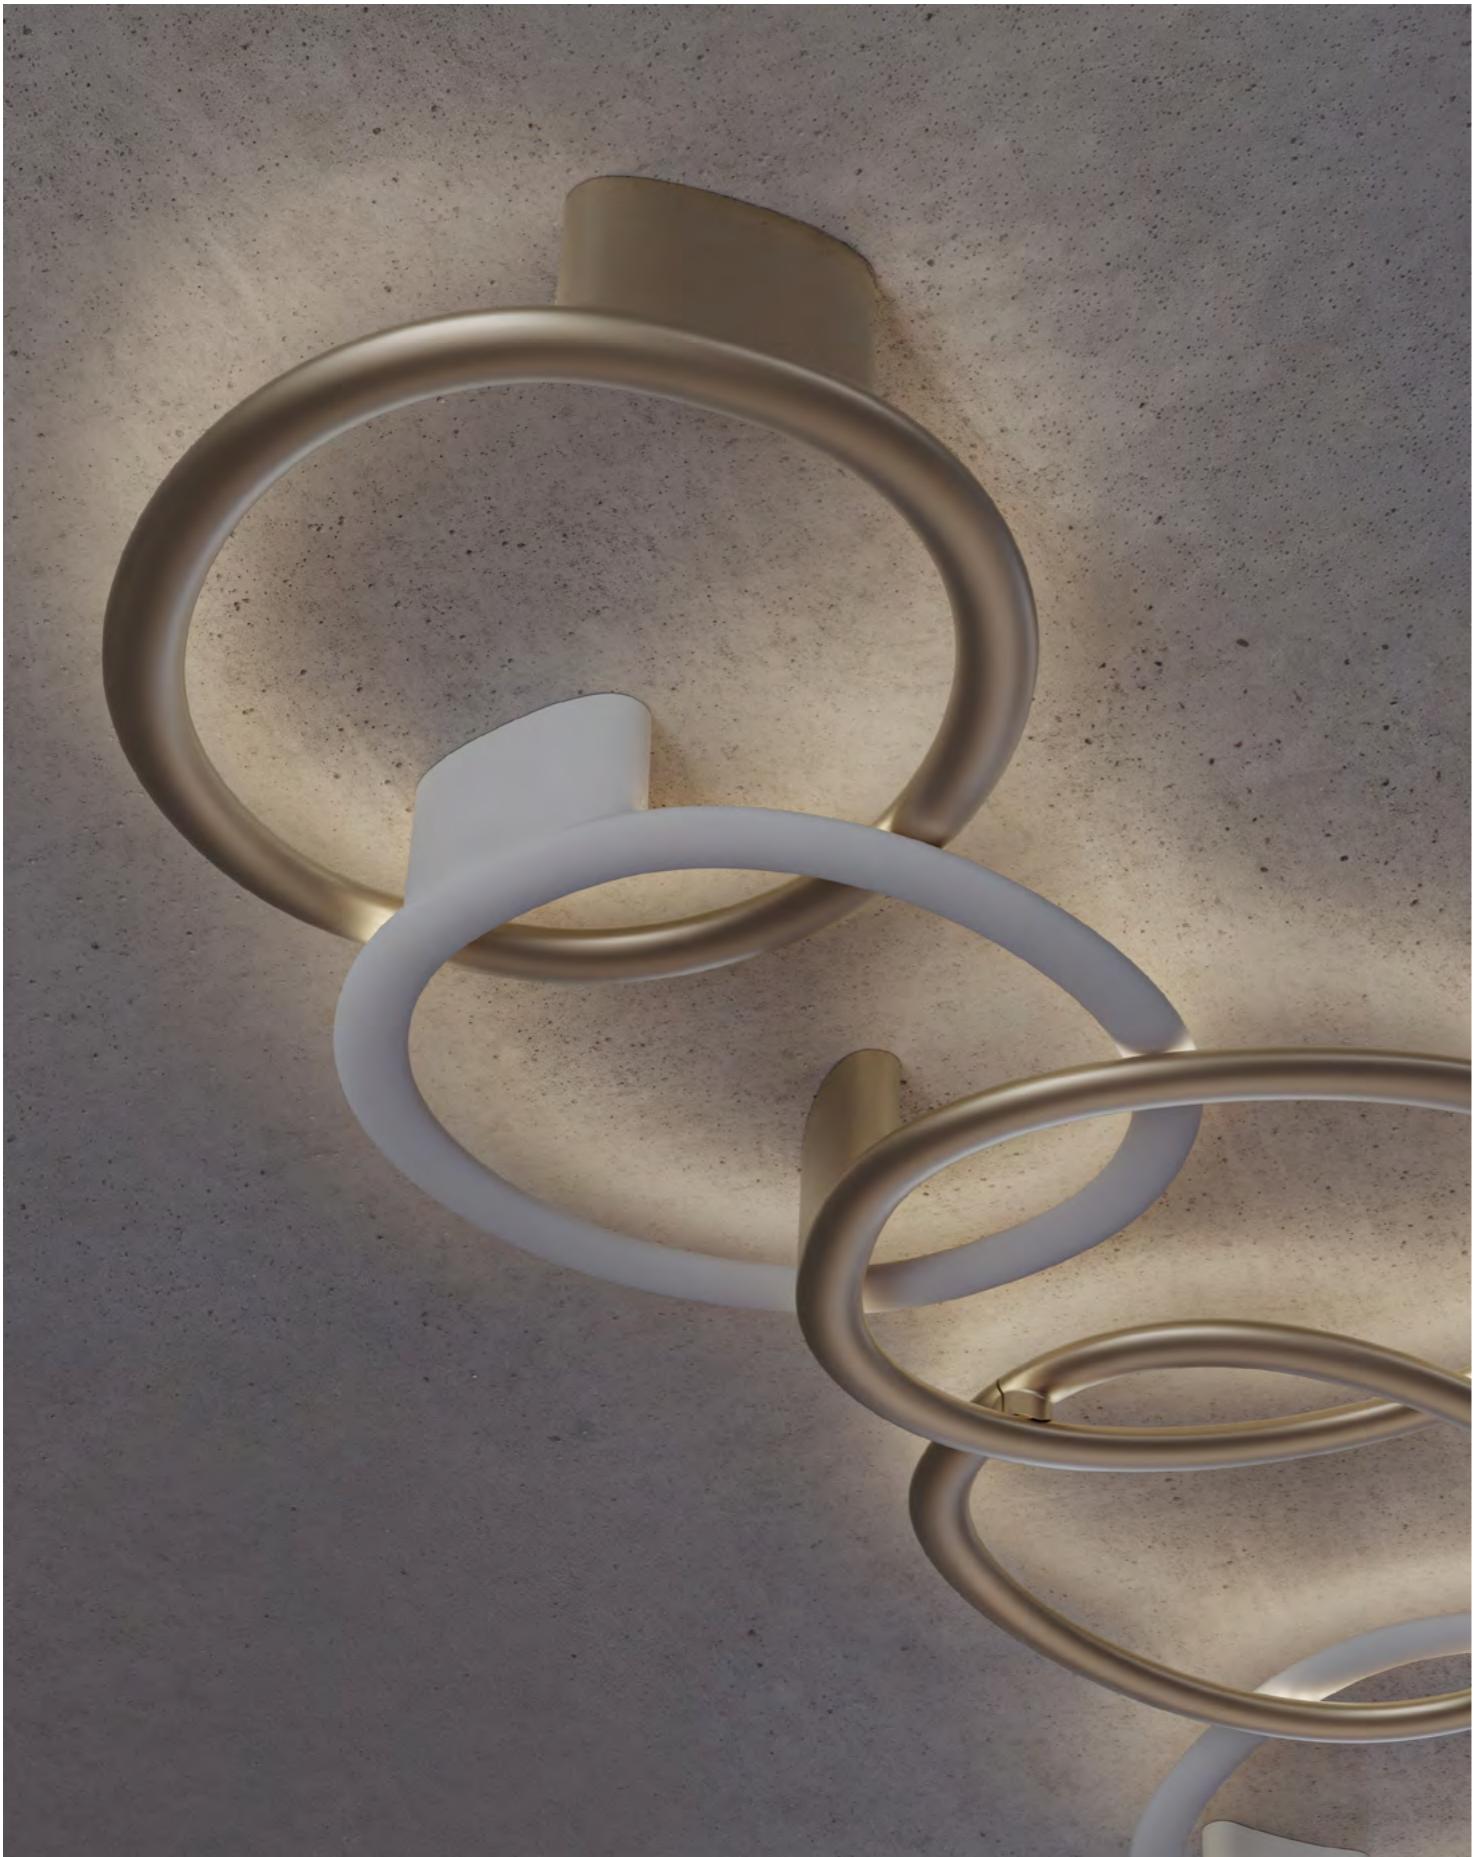

«From the front, a perfect circle—a pure and absolute form. But as soon as one moves, perception shifts: the line unfolds in volume, with one part close to the wall and the other suspended, creating an unexpected play of depth. This interplay of rings, crossing and connecting, forms a free and random path.»

—  
Patrick Jouin



Available in a single wall and ceiling version or a double configuration (two crossed rings), OR adapts and transforms, creating custom luminous compositions.



#### OR 2 P-PL

**Wall and ceiling, indoor.**  
Silver (only on request)  
liquid-painted finish (x2).

#### OR 1 P-PL

**Wall and ceiling, indoor.**  
Brass (only on request)  
liquid-painted finish (x2).

The decorative diffuser, made of painted polyurethane, is offered on request also in Silver and Brass finishes.



# Glassdome

A wall and ceiling lamp defined by its pure, simple design and its ability to diffuse a soft, enveloping light.

LEUCOS Design, 2025.

WALL AND CEILING

GLASSDOME P-PL 11  
Wall and ceiling, indoor.  
White glass diffuser,  
matte white structure.

LEUCOS CATALOG 2026



(36) (37)

# Glassdome



GLASSDOME P-PL 11  
Wall and ceiling, indoor.  
White glass diffuser,  
matte white structure.

GLASSDOME

COLLECTION



LEUCOS CATALOG 2026

(38) (39)

The white hand-blown glass diffuser, paired with its matte white structure, creates a delicate balance of transparency and solidity, forming a discreet yet striking presence in any space—especially when used in multiples.

Available in P-PL 11 and P-PL 14, Glassdome expresses the refinement of simplicity: a luminous gesture that enhances interiors with warmth and quiet sophistication.



**GLASSDOME P-PL 14**  
Wall and ceiling, indoor.  
White glass diffuser,  
matte white structure.

**GLASSDOME P-PL 11**  
Wall and ceiling, indoor.  
White glass diffuser,  
matte white structure.



**GLASSDOME P-PL 11**  
Wall and ceiling, indoor.  
White glass diffuser,  
matte white structure (x3).



**GLASSDOME P-PL 14**  
Wall and ceiling, indoor.  
White glass diffuser,  
matte white structure.

**GLASSDOME P-PL 11**  
Wall and ceiling, indoor.  
White glass diffuser,  
matte white structure.

Compact in form yet rich in atmosphere,  
it transforms light into an intimate and  
timeless experience.



**GLASSDOME P-PL 11**  
Wall and ceiling, indoor.  
White glass diffuser,  
matte white structure (x3).

# Aella

Aella is the "whirlwind", embodied by the dynamic movement captured in its hand-blown glass diffuser.

Toso & Massari, 1968-2024.

PENDANT  
TABLE  
FLOOR

**AELLA S 54**  
Pendant, indoor.  
Pink shaded white diffuser,  
matte bronze structure.

LEUCOS CATALOG 2026



(44) (45)

Emanating from the single point, an evanescent light cone grows to create sinuous patterns and harmonic reflections. Designed in 1968 by Toso and Massari, this collection of table, suspension, and floor lamps incorporates the essential and timeless design principles characteristic of LEUCOS' products.



AELLA T 30

Table, indoor.

Transparent with white spot diffuser,  
matte bronze structure.

AELLA

AELLA TR 45

Floor, indoor.

Transparent with white spot diffuser,  
matte black structure.



The Aella Collection embodies the "tornado" through the soft curves of its hand-blown glass diffuser, swirling outward to capture a harmonious and evanescent cyclone of light. Options include White Shaded Pink, Shaded Burgundy, and Transparent with White Spot, where size, shade, and intensity of the white paste color spot are determined by the Maestro glassmaker's skilled touch, ensuring each piece is unique.



**AELLA S 30**  
Pendant, indoor.  
Transparent with white spot diffuser,  
matte bronze structure (x3).

**AELLA S 54 L**  
Pendant, indoor.  
Pink shaded white diffuser,  
matte black structure (x2).



**AELLA S 45**

Pendant, indoor.

Shaded burgundy diffuser,  
matte bronze structure (x3).

Over fifty years since its debut, Aella continues to evolve with timeless elegance. In 2024, a special edition—Aella T 45 Openworked—was introduced, elevating the purity of light through a transparent glass base and exposed metal components.

Aella T 45 Openworked features two slim natural copper rods—essential elements that serve as both structural supports and as part of the lamp's visual balance—and a transparent glass diffuser with a white spot. The position, size, and intensity of the spot depend on the gesture and sensitivity of the Maestro, ensuring that each piece is original and never identical to another.



#### AELLA T 45 OPENWORKED

Table, indoor.

Transparent with white spot diffuser,  
transparent glass and matte white  
metal structure with copper rods.



#### AELLA T 45 OPENWORKED

Table, indoor.

Transparent with white spot diffuser,  
transparent glass and satin stainless  
steel structure with copper rods.

«The purity of light meets colorful metallic details, creating an unprecedented balance between the transparency of the glass diffuser and the strength of the colored metal structure»

—  
Noti Massari

# Stacking

Stacking orchestrates layered glass cylinders and precision-machined metal structures into a luminous composition of light and form.

David Rockwell, 2007-2025.

PENDANT  
WALL AND CEILING  
TABLE  
FLOOR

UPGRADED

STACKING S 180 H RIG  
Pendant, indoor.  
Transparent rigadin glass diffuser,  
anodized aluminum structure.



# Stacking



## ROUND CLUSTER CANOPY 55

Ceiling, indoor.

Matte white metal structure.

Learn more at p. 116-118.

## STACKING S 180 H MLR

Pendant, indoor.

Transparent millerighe glass diffuser,  
anodized aluminum structure.

## STACKING C TR


Floor, indoor.

Smoke grey, white, amber and transparent  
tobacco glass diffuser, gold metal structure.

## STACKING B TR

Floor, indoor.

Smoke grey, white and mirror glass diffuser,  
chrome metal structure.

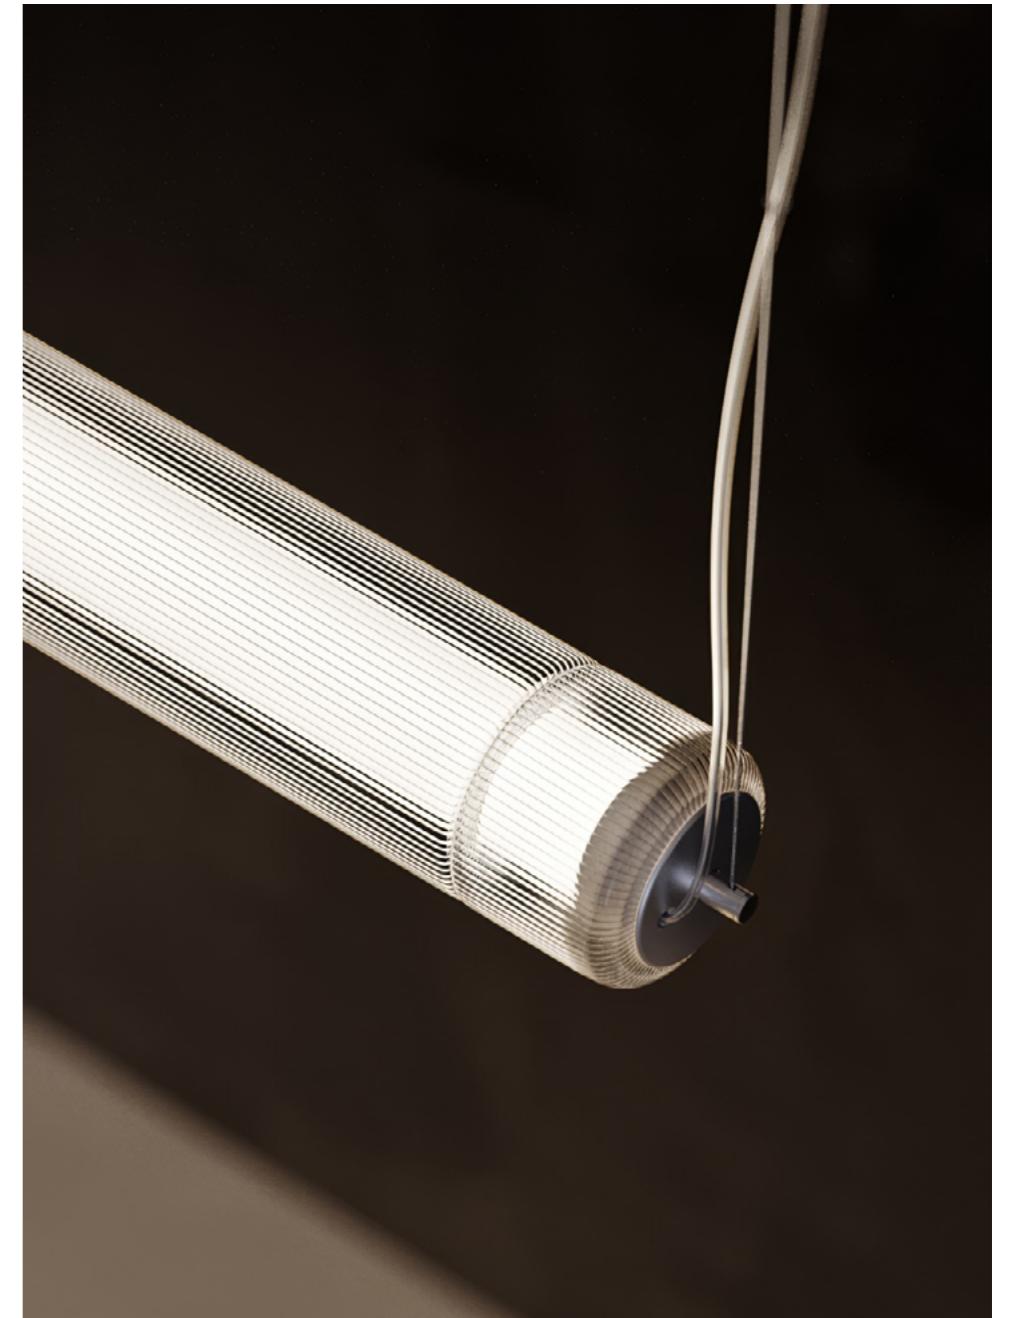

Stacking S is composed of a cylindrical diffuser powered by 5 high-quality LED strips. The decorative elements are crafted from blown borosilicate glass. Machined aluminum end-caps hold everything together and act as suspension anchoring points.

The new transparent millerighe glass option adds a distinctive striped texture, enhancing the dynamic and evocative interplay of light.



**STACKING C TR**  
Floor, indoor.

Smoke grey, white, amber and transparent tobacco glass diffuser, gold metal structure.

**STACKING B TR**  
Floor, indoor.


Smoke grey, white and mirror glass diffuser, chrome metal structure.

**STACKING D TR**  
Floor, indoor.

White, gold, transparent tobacco and black glass diffuser, gold metal structure.

The floor version was conceived in 2007 and pays homage to the rich Venetian glassmaking tradition employing the "incamiciato" technique (Italian for "jacketed" or "layered"), which requires skilled glassblowers to layer multiple glasses during the blowing process.

This labor-intensive technique builds different colors and opacities in each module. When these cylinder modules are combined and overlaid, a captivating mixture of colors cast a sophisticated ambient light.

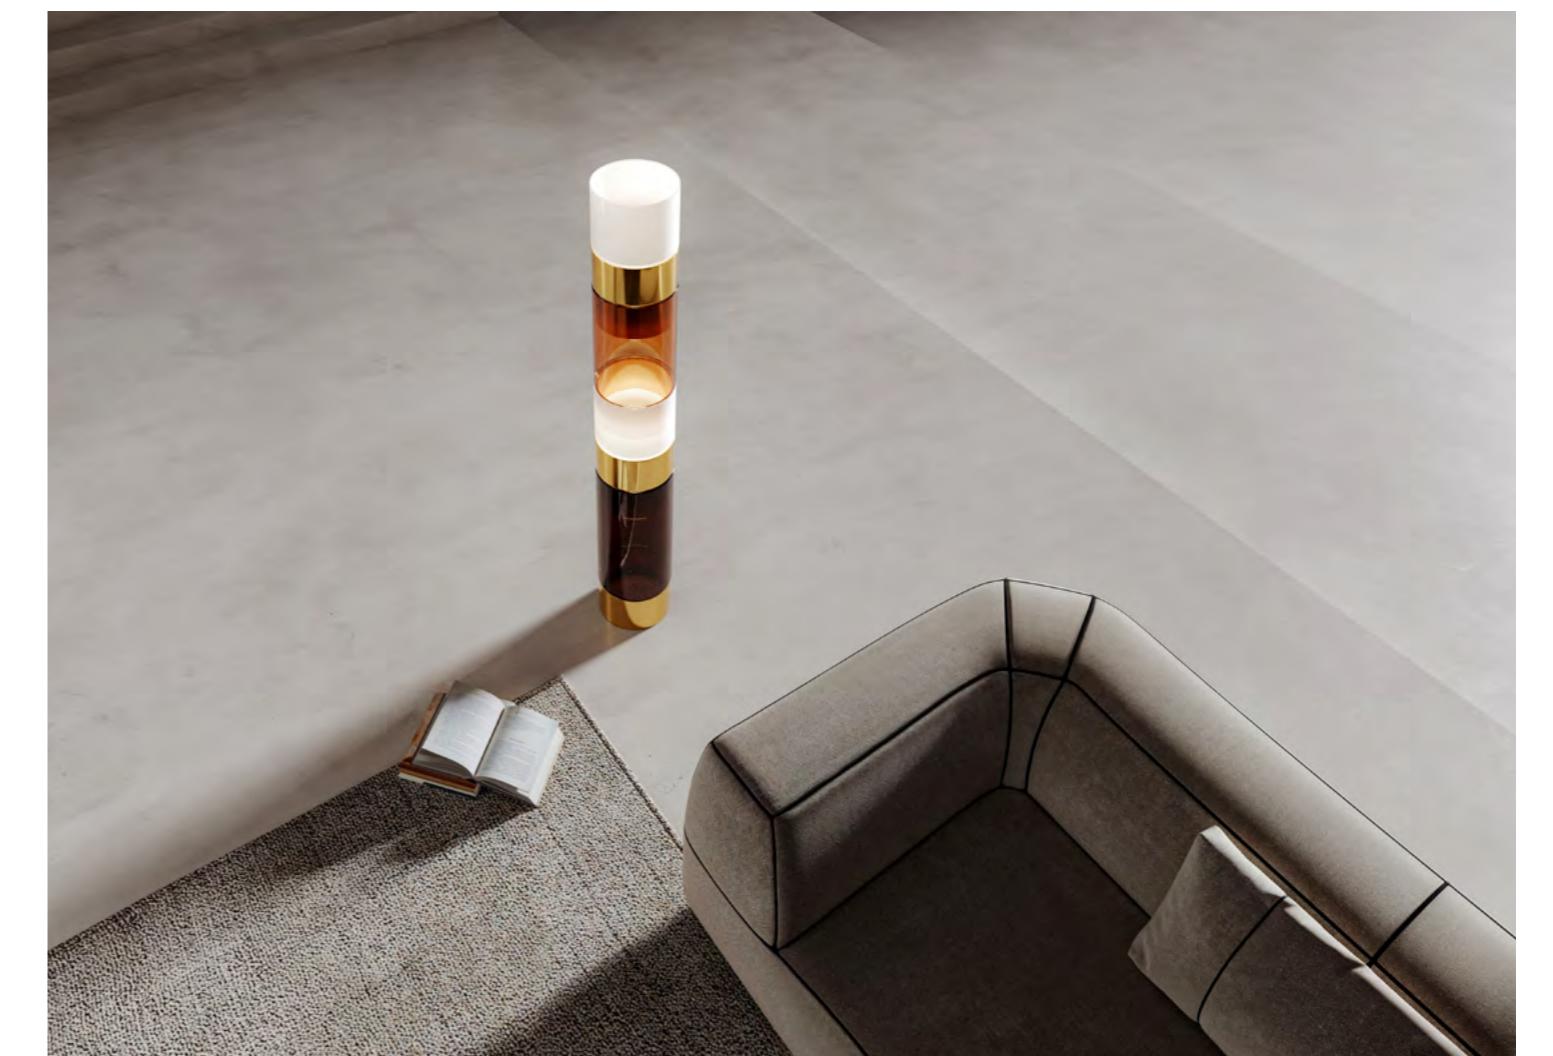



**STACKING S 90 V MLR**  
Pendant, indoor.  
Transparent millerighe glass diffuser,  
anodized aluminum structure (x2).

**STACKING S 30 V MLR VU**  
Pendant, indoor.  
Transparent millerighe single glass diffuser,  
anodized aluminum structure (x2).

**STACKING S 60 V MLR VU**  
Pendant, indoor.  
Transparent millerighe single glass diffuser,  
anodized aluminum structure (x2).



**STACKING S 180 H MLR**  
Pendant, indoor.  
Transparent millerighe glass diffuser,  
anodized aluminum structure (x1).

**RADIAL CLUSTER CANOPY 33**  
Ceiling, indoor.  
Matte white metal structure.

Please note that the dimming protocol  
for the composition shown above  
is On-off for US and Canada.

Learn more at p. 116-118.



#### STACKING S 30 V

Pendant, indoor.

Metallic titanium PVD metalized glass diffuser (x2) and transparent smooth glass diffuser (x2), anodized aluminum structure.

#### STACKING S 60 V

Pendant, indoor.

Metallic titanium PVD metalized glass diffuser (x1), metallic petrol blue PVD metalized glass diffuser (x1) and transparent smooth glass diffuser (x3), anodized aluminum structure (x1).

#### STACKING S 90 V

Pendant, indoor.

Transparent smooth glass diffuser, anodized aluminum structure (x3).

With three different sizes for the vertical versions and two for the horizontal ones, the suspended range can work in clusters and create beautiful and fascinating shapes of lights.

A refined table version, Stacking T 30X15 Rig, brings the architectural beauty of Stacking into more intimate spaces, creating a warm and sophisticated atmosphere.



#### STACKING T 30X15 RIG

Table, indoor.


Transparent rigadin glass diffuser, matte black structure.



**STACKING P-PL 30 RIG**  
Wall and ceiling, indoor.  
Transparent rigadin glass diffuser,  
anodized aluminum structure (x4).

**STACKING P-PL 60 RIG**  
Wall and ceiling, indoor.  
Transparent rigadin glass diffuser,  
anodized aluminum structure (x7).

**STACKING S 120 H**  
Pendant, indoor.  
Transparent smooth glass diffuser,  
anodized aluminum structure.

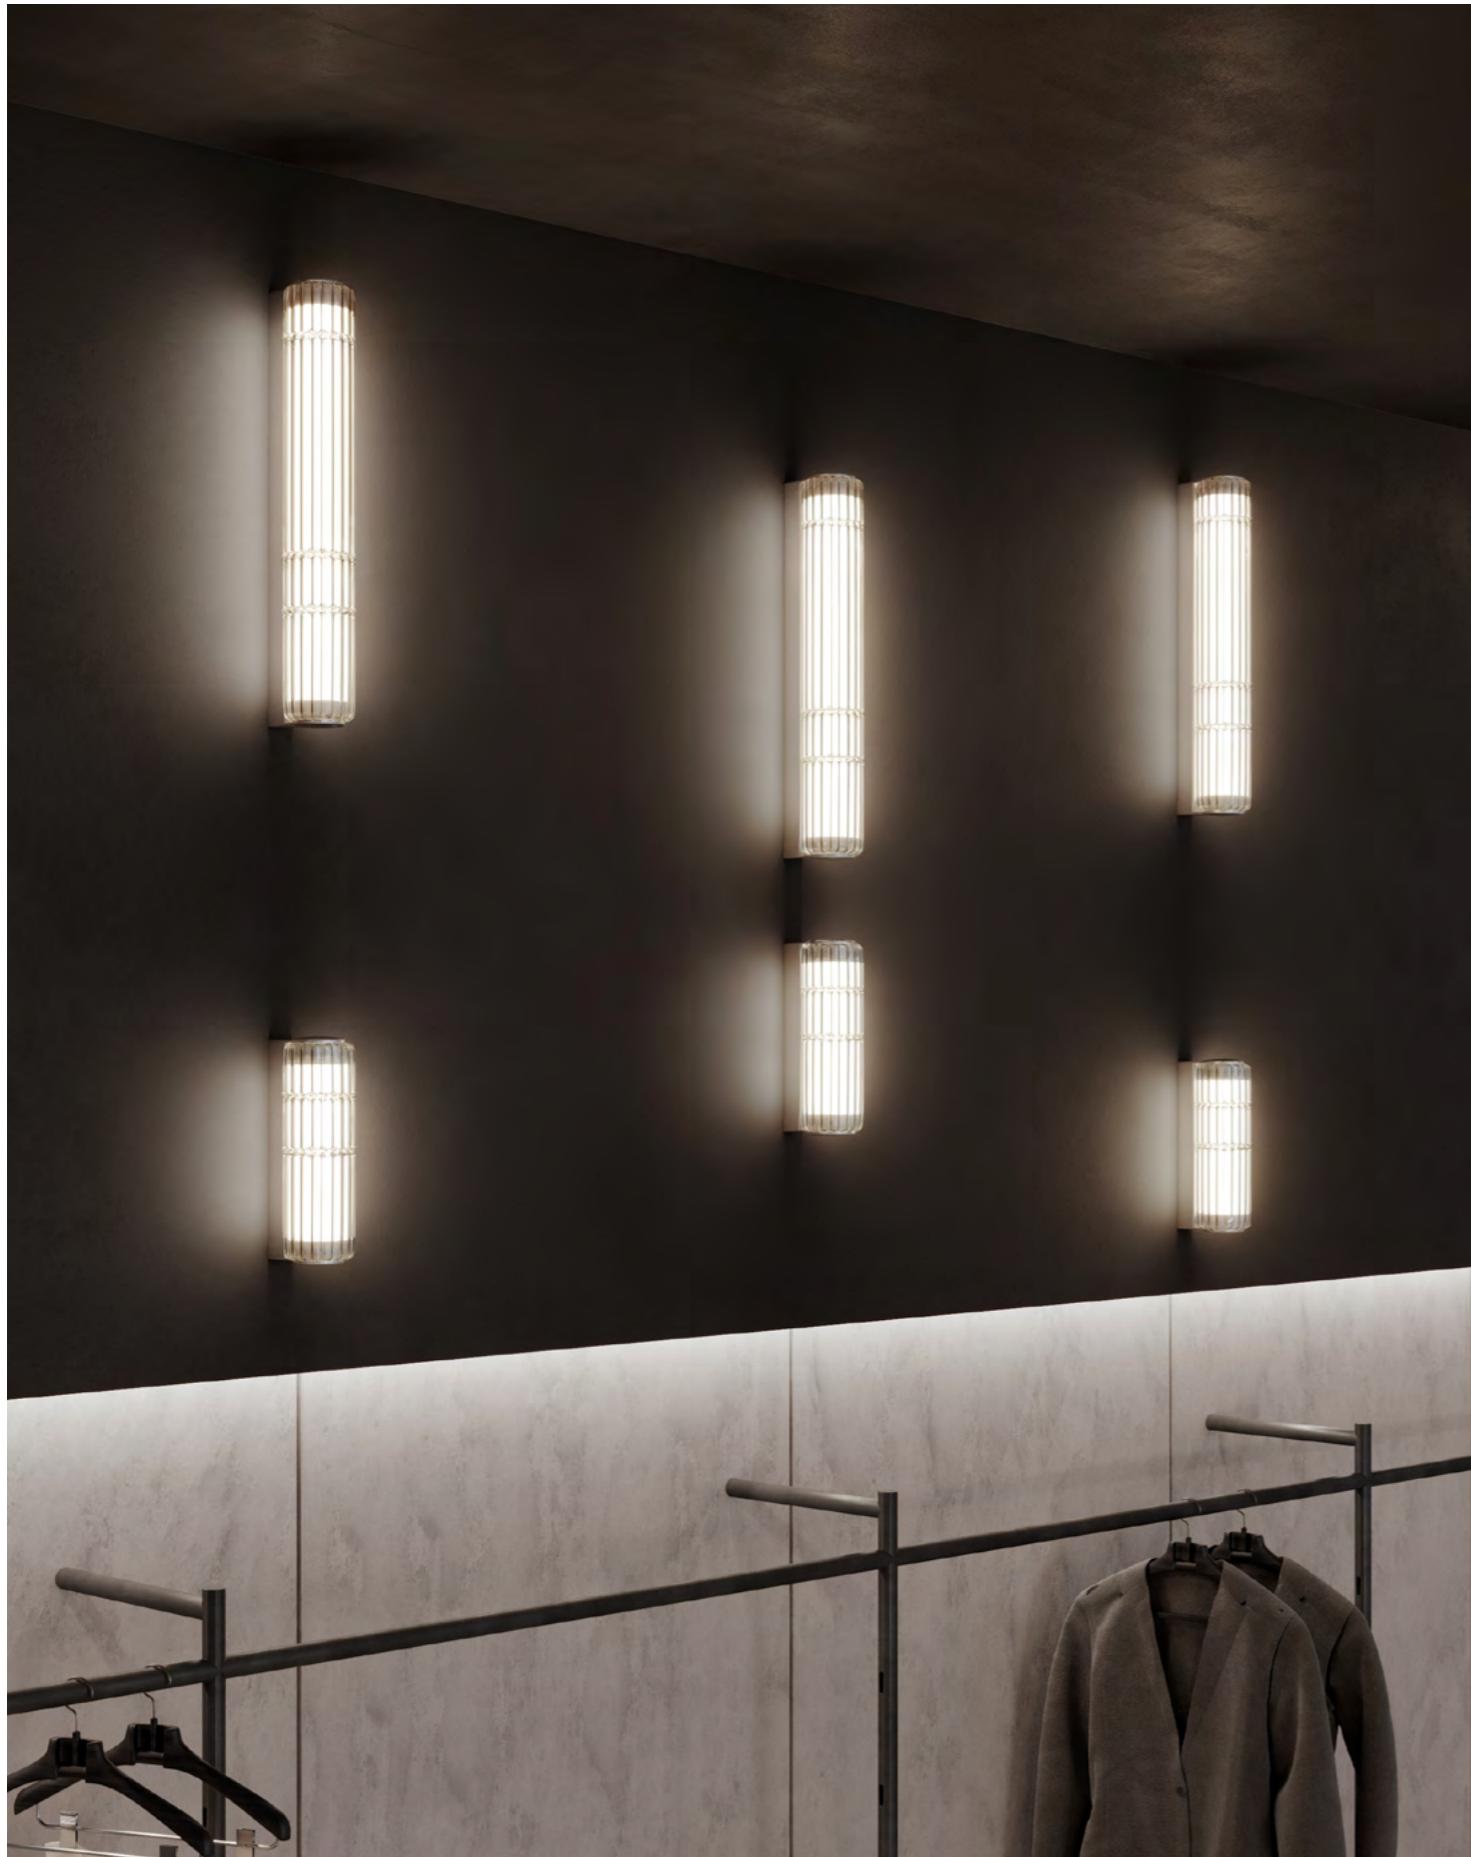


After defining its signature aesthetic through iconic floor and suspension versions, David Rockwell expands the modular language of Stacking with new wall and ceiling applications featuring single-glass variations.

The collection grows with two new applications, installable both vertically and horizontally, allowing for unique luminous effects in any setting.

The blown borosilicate glass diffuser, available in stacked cylindrical modules or as a single-glass variation, comes in transparent, ribbed or millerighe glass, combined with an anodized aluminum or matte black wrinkled metal structure.

Learn more about the glass arrangement of Stacking in the technical overview (p. 114-115).

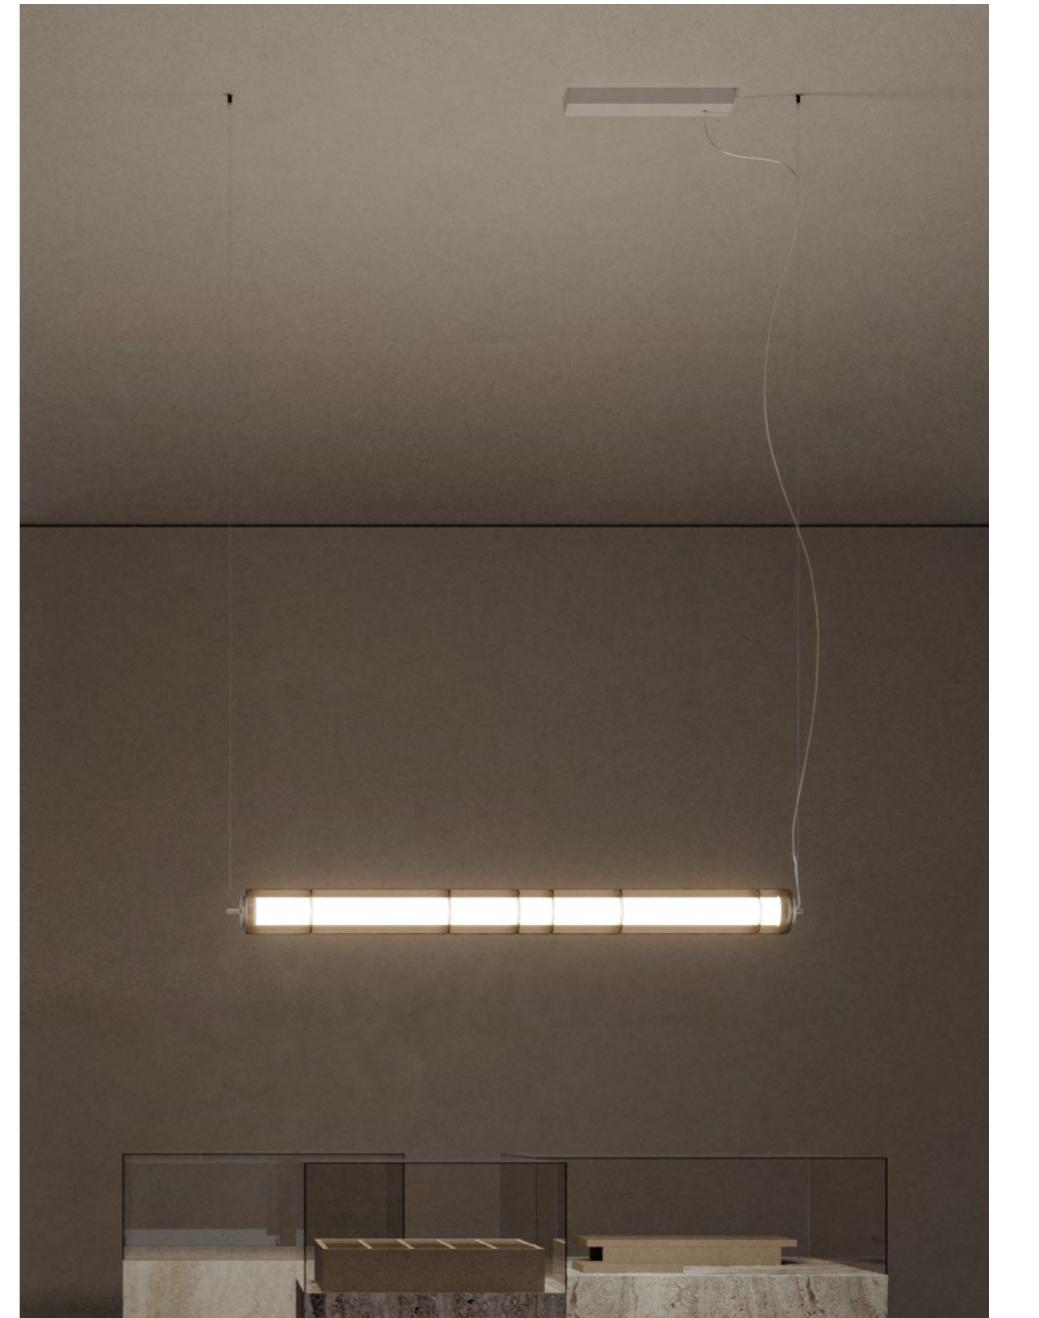

With this evolution, the Stacking collection offers even greater versatility, turning light into a defining architectural element within any space.



**STACKING S 60 V RIG**  
Wall and ceiling, indoor.  
Transparent rigadin glass diffuser,  
anodized aluminum structure.

STACKING

**STACKING P-PL 60 RIG**  
Wall and ceiling, indoor.  
Transparent rigadin glass diffuser,  
anodized aluminum structure.



LEUCOS CATALOG 2026

COLLECTION

(72) (73)

# Aurelia

A seamless fusion of artisanal glassmaking tradition and LEUCOS innovation.

Patrick Jouin, 2021.

PENDANT



AURELIA S 45

Pendant, indoor.

Shaded burgundy glass diffuser,  
matte gunmetal metal structure.

The hand-blown glass diffuser wraps around the metal structure, which houses two LED light sources.



**AURELIA S 45**  
Pendant, indoor.  
Shaded burgundy glass diffuser,  
matte gunmetal metal structure.

**AURELIA BOLD S 22**  
Pendant, indoor.  
Transparent "Pulegoso" with metal  
powder inclusion glass diffuser, vintage  
brass metal structure.

**AURELIA BOLD S 22**  
Pendant, indoor.  
Shaded burgundy glass diffuser,  
matte gunmetal metal structure.

The two light sources offer the possibility of simultaneous switching (direct + indirect) and are dimmable, creating both soft direct light and surprising, unexpected indirect reflections.



**AURELIA S 45**  
Pendant, indoor.  
Transparent "Pulegoso" with metal powder inclusion glass diffuser, vintage brass metal structure.






**AURELIA S 45**  
Pendant, indoor.  
Transparent water effect glass diffuser,  
matte gunmetal metal structure (x1).



**AURELIA BOLD S 22**  
Pendant, indoor.  
Transparent water effect glass diffuser,  
matte gunmetal metal structure (x2).

**AURELIA BOLD S 22**  
Pendant, indoor.  
Shaded burgundy glass diffuser,  
matte white metal structure (x3).

Available in two shapes and two sizes, Aurelia Collection offers several color combinations for the hand-blown glass diffuser and the metal structure.

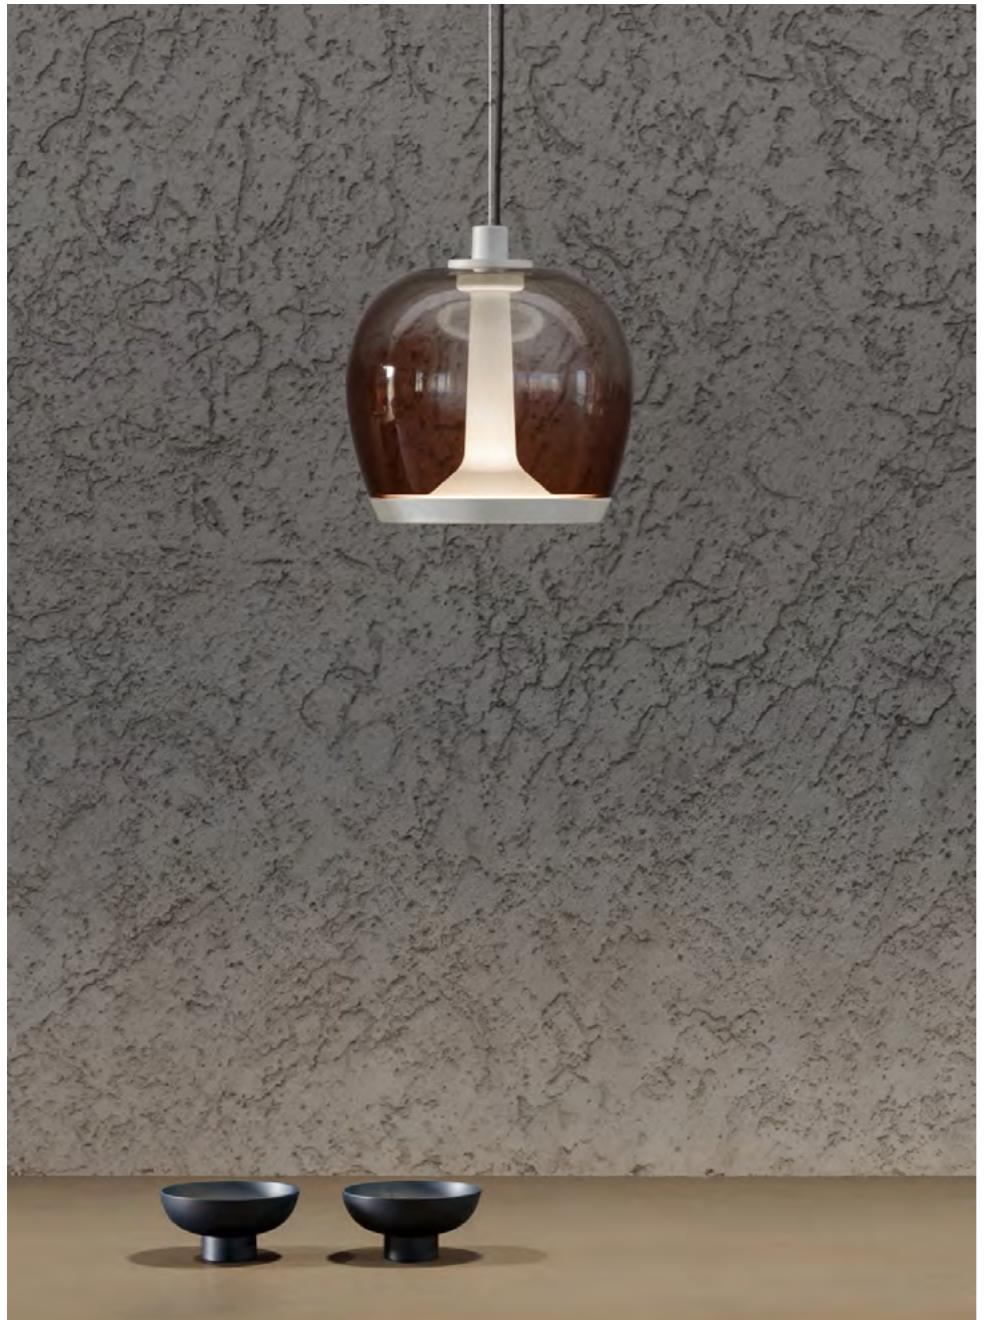

The Aurelia Collection presents a variety of color combinations for the hand-blown glass diffuser, each one unique in its shade and the effects created by the glassmaker. Options include Transparent "Pulegoso" with metal powder inclusion, Transparent Water Effect, and Shaded Burgundy.

Aurelia is a breathtaking collection of suspension lamps in which functionality and craftsmanship meet aesthetics and elegance.



# Ether

Ether is a suspension lamp that illuminates and transforms the space through its cascading composition of transparent blown borosilicate glass spheres.

Patrick Jouin, 2006-2025.

PENDANT

UPGRADED

ETHER S 150 SQ VERSION C

Pendant, indoor.

Transparent glass diffuser,  
matte white metal structure.



# Ether



**ETHER SPECIAL VERSION**  
Pendant, indoor.  
Transparent glass diffuser.

Custom cascading composition.



Ether is composed of clusters of transparent blown borosilicate glass elements in three different sizes, each handmade and uniquely dimpled, so that no two pieces are alike. The result is an ether of shimmering glass and light that dazzles and delights.

Ether is available in three standard versions (Ethers S, Ether S 90 and Ether S 150), but it can be customized in any size, finish, or configuration.



Ether is light and airy, yet it creates a hypnotizing visual impact.



**ETHER S 150 SQ VERSION B**  
Pendant, indoor.  
Transparent glass diffuser,  
matte white metal structure (x2).

**ETHER S 150 SQ VERSION C**  
Pendant, indoor.  
Transparent glass diffuser,  
matte white metal structure (x2).

Composition layout:  
B+C+C+B  
  
Learn more about the cascading configurations of Ether in the technical overview (p. 131-132).

Ether evolves with the integration of LED light sources, enhancing both energy efficiency and light quality, while offering new opportunities for customized installations through an expanded range of ceiling canopies.

The new matte white metal canopies are available in two round sizes (Ø48 cm and Ø68 cm) and a square version (70x70 cm), designed for both single and modular installations.

These canopies allow multiple elements to be arranged in linear, clustered, or square compositions, providing greater design flexibility.



# TECHNICAL OVERVIEW

## ( INFO )

Please visit [leucos.com](http://leucos.com) or refer to the price list for full specifications and codification details.

## ( COLORS AND FINISHES )

Refer to the numbers in square brackets for the available colors and finishes of each collection.

# Stripe

PENDANT  
STRIPE S 180X8 H



WALL AND CEILING  
STRIPE P-PL 120X8  
STRIPE P-PL 90X8



[3]

[2]

PENDANT COUNTERWEIGHT  
STRIPE S 120X8 CWT



FLOOR  
STRIPE TR 180X15



[1]

[2]

## COLORS AND FINISHES



### Steel structure and diffuser

BRUSHED STAINLESS STEEL

MATTE TERRACOTTA (RAL 8004)


MATTE YELLOW (RAL 1018)

MATTE WHITE (RAL 9016)

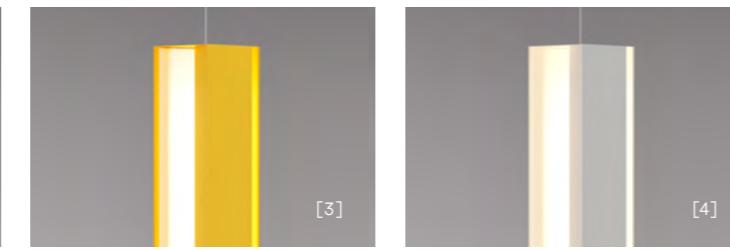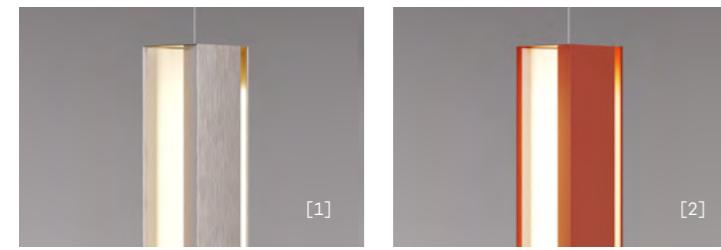

Stripe S 120X8 CWT representing colors and finishes for the complete Stripe collection (unless otherwise specified).

## ROTATABLE DIFFUSER STRIPE S/S CWT/P-PL ONLY

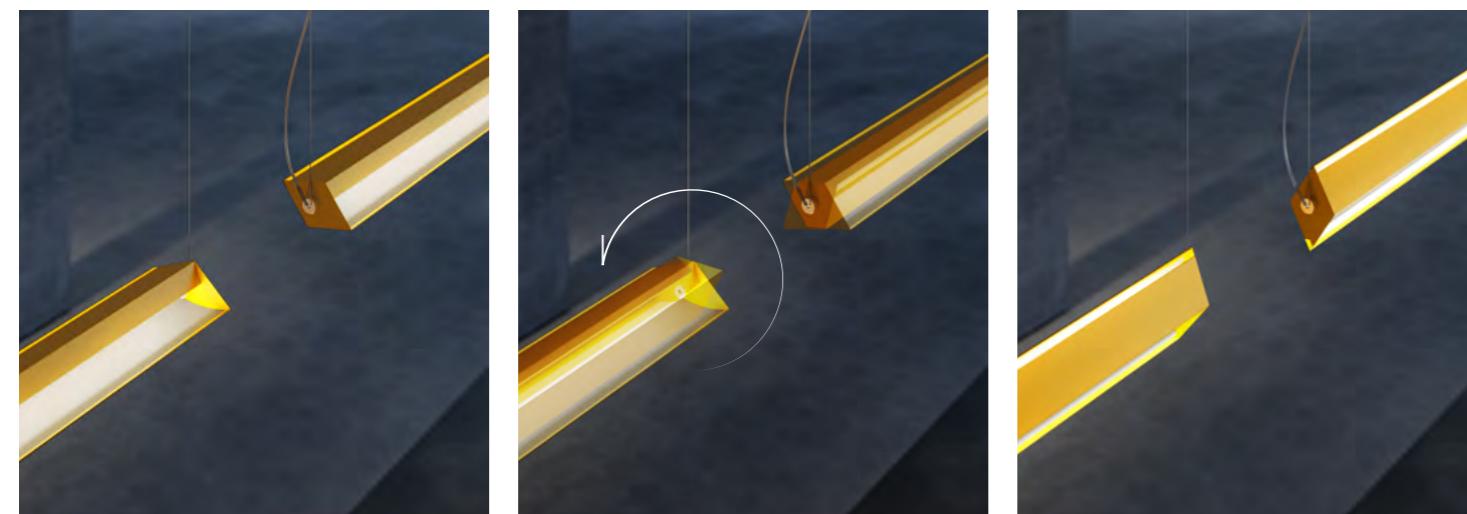

The metal body of Stripe (S) can rotate on itself, adding another layer of interaction and flexibility to its luminous presence.

# STRIPE S PENDANT

### NOVELTIES

#### Designer

Mayice Studio, 2025.

#### Category

Pendant, indoor.

#### Materials

Structure and diffuser: steel with painted finishing.

#### Light source

Replaceable LED.

#### Dimming protocol

Push-dim; 0/1-10V; Dali.

#### US AND CANADA

0/1-10V; Phase Cut.

### STRIPE S 180X8 H

#### DIMENSIONS


Diffuser: 8 cm X 8 cm (3 1/8" X 3 1/8"), L180 cm (70 7/8").  
Depth: 7-12 cm (2 3/4"-4 3/4").  
Canopy: 40 cm X 7 cm X 4 cm (15 3/4" X 2 3/4" X 1 5/8").  
Cable length: 300 cm (118 1/8").

#### LIGHT SOURCE

3000K, LED 1 X 35,3W, 5194 lm (nominal), CRI≥90.  
2700K, LED 1 X 35,3W, 5123 lm (nominal), CRI≥90.

#### NET WEIGHT

7,5 kg (16,5 lbs).

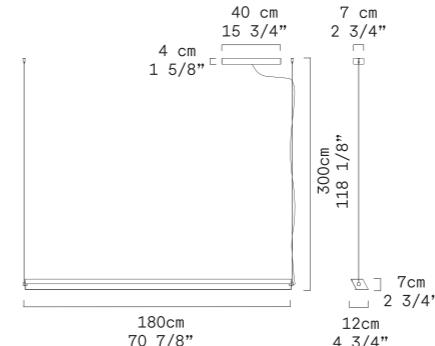


#### Marks

DRY LOCATION  
 (pending)

#### Notes

Rotatable diffuser.

#### COLORS AND FINISHES



#### Canopy

Same color and finish as the lamp.

# STRIPE S CWT PENDANT COUNTERWEIGHT

## NOVELTIES

### Designer

Mayice Studio, 2025.

### Category

Counterweight pendant,  
indoor.

### Materials

Structure and diffuser:  
brushed stainless steel  
or steel with painted finishing.

### Light source

Replaceable LED.

### Dimming protocol

Dimmer on cord.

### US AND CANADA

Dimmer on cord.


### Marks

  DRY LOCATION  
 (pending)



### Notes

Rotatable and height-adjustable  
diffuser.

### COLORS AND FINISHES



### COUNTERWEIGHT

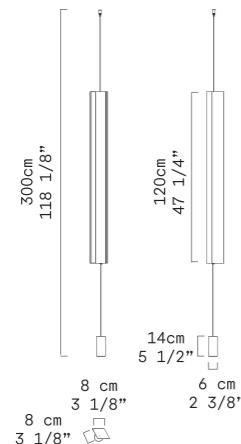

## STRIPE S 120X8 CWT

### DIMENSIONS

Diffuser: 8 cm X 8 cm (3 1/8" X 3 1/8"), H120 cm (47 1/4").  
Counterweight: Ø6 cm (2 3/8"), H14 cm (5 1/2").  
Cable length: 300 cm (118 1/8").

### LIGHT SOURCE

3000K, LED 1 X 23,3W, 3430 lm (nominal), CRI≥90.  
2700K, LED 1 X 23,3W, 3383 lm (nominal), CRI≥90.

### US AND CANADA

3000K, LED 1 X 23,3W, 3430 lm (nominal), CRI≥90.  
2700K, LED 1 X 23,3W, 3383 lm (nominal), CRI≥90.

### NET WEIGHT

8 kg (17,7 lbs).



The metal body of Stripe S CWT  
can slide vertically and rotate on  
its axis.

# STRIPE P-PL WALL AND CEILING

## NOVELTIES

### Designer

Mayice Studio, 2025.

### Category

Wall and ceiling, indoor.

### Materials

Structure and diffuser:  
steel with painted finishing.

### Light source

Replaceable LED.


### Dimming protocol

Push-dim; Dali.

### US AND CANADA

0/1-10V; Phase Cut.

### Marks




### Notes

Can be installed vertically  
and horizontally.

Rotatable diffuser.

### COLORS AND FINISHES



## STRIPE P-PL 120X8

### DIMENSIONS

Diffuser: 8 cm X 8 cm (3 1/8" X 3 1/8"), L120 cm (47 1/4").  
Depth: 11-13 cm (4"-5 1/2").  
Height: 10-14 cm (4 3/8"-5 1/8").

### LIGHT SOURCE


3000K, LED 1 X 23,3W, 3430 lm (nominal), CRI≥90.  
2700K, LED 1 X 23,3W, 3383 lm (nominal), CRI≥90.

### US AND CANADA

3000K, LED 1 X 23,3W, 3430 lm (nominal), CRI≥90.  
2700K, LED 1 X 23,3W, 3383 lm (nominal), CRI≥90.

### NET WEIGHT

6 kg (13,3 lbs).



## STRIPE P-PL 90X8

### DIMENSIONS

Diffuser: 8 cm X 8 cm (3 1/8" X 3 1/8"), L90 cm (35 3/8").  
Depth: 11-13 cm (4"-5 1/2").  
Height: 10-14 cm (4 3/8"-5 1/8").

### LIGHT SOURCE


3000K, LED 1 X 17,3W, 2548 lm (nominal), CRI≥90.  
2700K, LED 1 X 17,3W, 2513 lm (nominal), CRI≥90.

### US AND CANADA

3000K, LED 1 X 17,3W, 2548 lm (nominal), CRI≥90.  
2700K, LED 1 X 17,3W, 2513 lm (nominal), CRI≥90.

### NET WEIGHT

4,5 kg (10 lbs).



# STRIPE TR FLOOR

## NOVELTIES

### Designer


Mayice Studio, 2025.

### Category

Floor, indoor.

### Materials

Structure and diffuser:  
brushed stainless steel or steel  
with painted finishing.

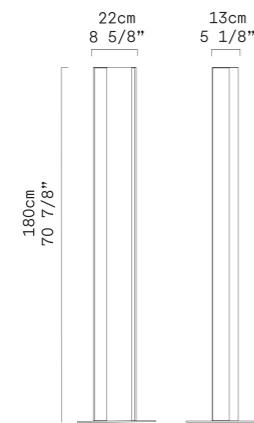

## STRIPE TR 180X15

DIMENSIONS	Diffuser: 15 cm X 15 cm (5 7/8" X 5 7/8"). H180 cm (70 7/8"). Base: Ø40 cm (15 3/4"). Cable lenght: 230 cm (90 1/2").
LIGHT SOURCE	3000K, LED 1 X 70,6W, 10387 lm (nominal), CRI≥90. 2700K, LED 1 X 70,6W, 10246 lm (nominal), CRI≥90.
US AND CANADA	3000K, LED 1 X 70,6W, 10387 lm (nominal), CRI≥90. 2700K, LED 1 X 70,6W, 10246 lm (nominal), CRI≥90.

NET WEIGHT 17,2 kg (38 lbs).

### Light source

Replaceable LED.

### Dimming protocol

Dimmer on cord.


### US AND CANADA

Dimmer on cord.

### Marks


DRY LOCATION

### COLORS AND FINISHES



# OR

## WALL AND CEILING OR 2 P-PL

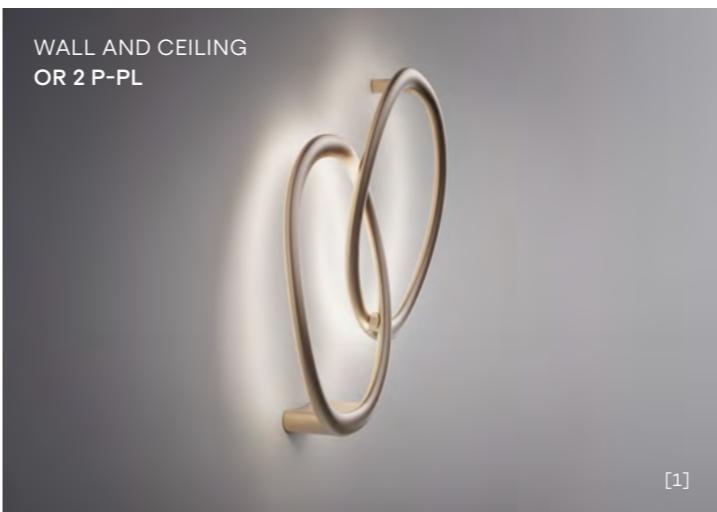

## WALL AND CEILING OR 1 P-PL




## ONLY ON REQUEST


## COLORS AND FINISHES STANDARD

### Polyurethane structure


MATTE WHITE

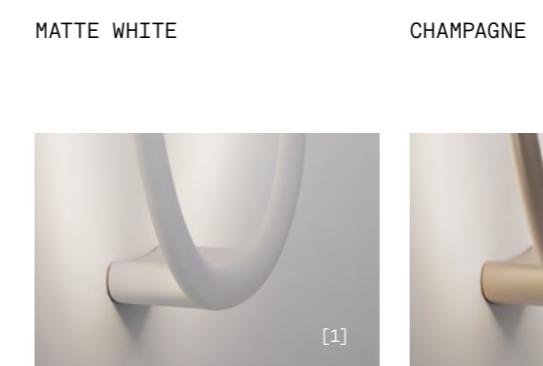


CHAMPAGNE

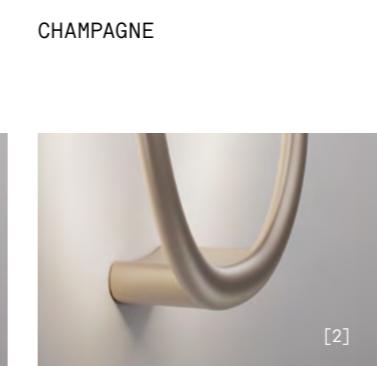

SILVER

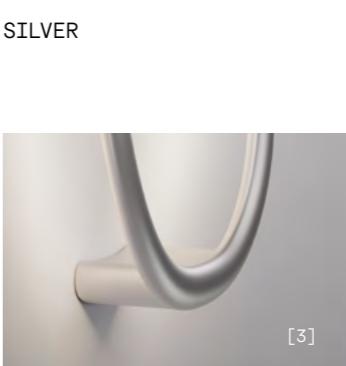

BRASS

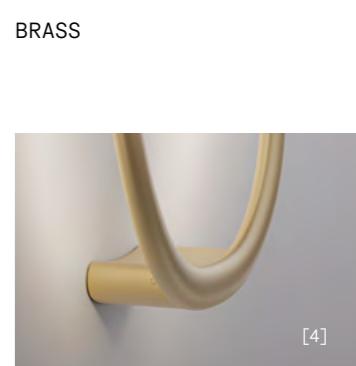

OR 1 P-PL representing colors and finishes for the complete OR collection (unless otherwise specified).

# OR P-PL WALL AND CEILING

## NOVELTIES

### Designer

Patrick Jouin, 2025.

### Category

Wall and ceiling, indoor.

### Materials

Liquid-painted polyurethane.

### Light source

Replaceable LED.

### Dimming protocol

Push-dim; 0/1-10V; Dali.

### US AND CANADA

Push-dim; 0/1-10V; Dali.


### Marks

  DRY LOCATION




### STANDARD

#### COLORS AND FINISHES



#### COLORS AND FINISHES ONLY ON REQUEST




## OR 2 P-PL

**DIMENSIONS**  
Width: 60 cm (23 5/8").  
Height: 70,5 cm (27 3/4").  
Depth: 10 cm (4").

**LIGHT SOURCE**  
3000K, LED 1 X 11,5W + 1 X 12,5W (24W total), 1248 lm (nominal), CRI≥90.  
2700K, LED 1 X 11,5W + 1 X 12,5W (24W total), 1200 lm (nominal), CRI≥90.

**US AND CANADA**  
3000K, LED 1 X 5,75W + 1 X 6,25W (12W total), 1094 lm (nominal), CRI≥90.  
2700K, LED 1 X 5,75W + 1 X 6,25W (12W total), 1056 lm (nominal), CRI≥90.

**NET WEIGHT** 2,5 kg (5,5 lbs).

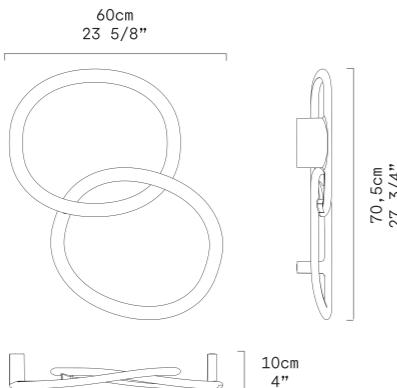


## OR 1 P-PL

**DIMENSIONS**  
Width: 41,5 cm (16 3/8").  
Height: 48,1 cm (18 7/8").  
Depth: 10 cm (4").

**LIGHT SOURCE**  
3000K, LED 1 X 11,5W, 598 lm (nominal), CRI≥90.  
2700K, LED 1 X 11,5W, 575 lm (nominal), CRI≥90.

**US AND CANADA**  
3000K, LED 1 X 11,5W, 598 lm (nominal), CRI≥90.  
2700K, LED 1 X 11,5W, 575 lm (nominal), CRI≥90.

**NET WEIGHT** 1,5 kg (3,3 lbs).

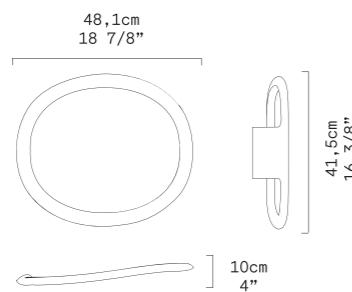

# Glassdome



## COLORS AND FINISHES

### Glass diffuser

WHITE



Metal structure

MATTE WHITE

Glassdome P-PL 11 representing the color and finish for the complete Glassdome collection (unless otherwise specified).

# GLASSDOME P-PL WALL AND CEILING

## NOVELTIES

### Designer


LEUCOS Design, 2025.

### Category

Wall and ceiling, indoor.

### Materials

Diffuser: hand-blown glass.  
Structure: metal.




### GLASSDOME P-PL 14

DIMENSIONS	Diffuser: Ø12 cm (4 3/4"), H14,2 cm (5 5/8"). Structure: Ø15,8 cm (6 1/4").
LIGHT SOURCE	1 X max. 18W E27 Retrofit LED bulb.
US AND CANADA	1 X max. 18W E26 Retrofit LED bulb.
NET WEIGHT	1 kg (2,2 lbs).

### Light source

E27 Retrofit LED bulb  
(not included).



### GLASSDOME P-PL 11

DIMENSIONS	Diffuser: Ø12 cm (4 3/4"), H11 cm (4 3/8"). Structure: Ø15,8 cm (6 1/4").
LIGHT SOURCE	1 X max. 8W E27 Retrofit LED bulb.
US AND CANADA	1 X max. 8W E26 Retrofit LED bulb.
NET WEIGHT	1 kg (2,2 lbs).

### Marks

DRY LOCATION

## COLORS AND FINISHES

White glass diffuser,  
matte white metal structure.

# Aella



## COLORS AND FINISHES

Glass diffuser

### Metal structure

MATTE WHITE



TRANSPARENT WITH WHITE SPOT



PINK SHADED WHITE



MATTE BLACK



MATTE BRONZE



Aella T 45 representing colors and finishes for the complete Aella collection (unless otherwise specified).

## AELLA T OPENWORKED



Transparent with white spot diffuser, transparent glass and satin stainless steel structure with copper rods.



Transparent with white spot diffuser, transparent glass and matte white metal structure with copper rods.

# AELLA S L PENDANT

### Designer


Toso & Massari, 2016, 2023.

### Category

Pendant, indoor.

### Materials

Diffuser: hand-blown glass.  
Structure: metal.

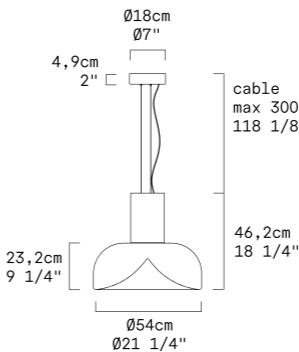

### AELLA S 54 L

Diffuser: Ø54 cm (21 1/4"), H23,2 cm (9 1/4").  
Canopy: Ø18 cm (7"), H4,9 cm (2").  
Cable lenght: 300 cm (118 1/8").

3000K, LED 1 X 26,6W, 4060 lm (nominal), CRI≥90.  
2700K, LED 1 X 26,6W, 3808 lm (nominal), CRI≥90.

US AND CANADA  
3000K, LED 1 X 26,6W, 4060 lm (nominal), CRI≥90.  
2700K, LED 1 X 26,6W, 3808 lm (nominal), CRI≥90.

NET WEIGHT 13,9 kg (30,7 lbs).


### Light source

Replaceable LED.

### Dimming protocol

Push-dim; 0/1-10V; Dali.

US AND CANADA  
Push-dim; 0/1-10V; Dali.  
OR  
0/1-10V; Phase-cut.



### AELLA S 45 L

Diffuser: Ø45 cm (17 3/4"), H19,3 cm (7 1/2").  
Canopy: Ø18 cm (7"), H4,9 cm (2").  
Cable lenght: 300 cm (118 1/8").

3000K, LED 1 X 16,6W, 2624 lm (nominal), CRI≥90.  
2700K, LED 1 X 16,6W, 2461 lm (nominal), CRI≥90.

US AND CANADA  
3000K, LED 1 X 14,2W, 2219 lm (nominal), CRI≥90.  
2700K, LED 1 X 14,2W, 2118 lm (nominal), CRI≥90.  
0/1-10V; Phase-cut version:  
3000K, LED 1 X 21,5W, 3289 lm (nominal), CRI>90.  
2700K, LED 1 X 21,5W, 3082 lm (nominal), CRI>90.

NET WEIGHT 8,15 kg (18 lbs).



### Marks



DRY LOCATION



### Notes


Class 3 version installation  
with remote driver available  
on request (supplied without  
canopy and driver).

### COLORS AND FINISHES



### Canopy

Same color and finish  
as the structure.



### AELLA S 30 L

Diffuser: Ø30 cm (11 3/4"), H12,9 cm (5 1/8").  
Canopy: Ø14,5 cm (5 3/4"), H4,6 cm (1 3/4").  
Cable lenght: 300 cm (118 1/8").

3000K, LED 1 X 11,9W, 1635 lm (nominal), CRI≥90.  
2700K, LED 1 X 11,9W, 1535 lm (nominal), CRI≥90.

US AND CANADA  
3000K, 1 X 11,9W, 1635 lm (nominal), CRI≥90.  
2700K, 1 X 11,9W, 1535 lm (nominal), CRI≥90.

NET WEIGHT 3,8 kg (8,4 lbs).

# AELLA S PENDANT

**Designer**  
Toso & Massari, 2016, 2023.

**Category**  
Pendant, indoor.

**Materials**  
Diffuser: hand-blown glass.  
Structure: metal.


**Light source**  
Replaceable LED.

**Dimming protocol**  
Push-dim; 0/1-10V; Dali.  
**US AND CANADA**  
Push-dim; 0/1-10V; Dali.  
OR  
0/1-10V; Phase-cut.

**Marks**  
  DRY LOCATION 


**Notes**  
Class 3 version installation  
with remote driver available  
on request (supplied without  
canopy and driver).

**COLORS  
AND FINISHES**

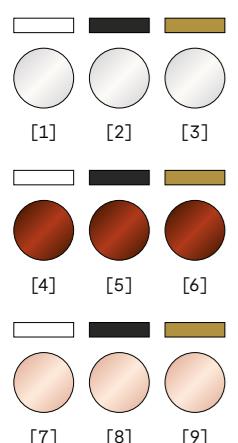

## Canopy

Same color and finish  
as the structure.



## AELLA S 54

<b>DIMENSIONS</b>	Diffuser: Ø54 cm (21 1/4"), H23,2 cm (9 1/4"). Canopy: Ø18 cm (7"), H4,9 cm (2"). Cable lenght: 300 cm (118 1/8").
<b>LIGHT SOURCE</b>	3000K, LED 1 X 26,6W, 4060 lm (nominal), CRI≥90. 2700K, LED 1 X 26,6W, 3808 lm (nominal), CRI≥90.
<b>US AND CANADA</b>	3000K, LED 1 X 26,6W, 4060 lm (nominal), CRI≥90. 2700K, LED 1 X 26,6W, 3808 lm (nominal), CRI≥90.
<b>NET WEIGHT</b>	13 kg (28,6 lbs).

# AELLA T TABLE

## Designer

Toso & Massari, 1968, 2017, 2023.

**Category**  
Table, indoor.

**Materials**  
Diffuser: hand-blown glass.  
Structure: metal.

**Light source**  
Replaceable LED.

## Dimming protocol



Dimmer on cord.

**US AND CANADA**  
Dimmer on cord.

## Marks


  DRY LOCATION

## COLORS AND FINISHES

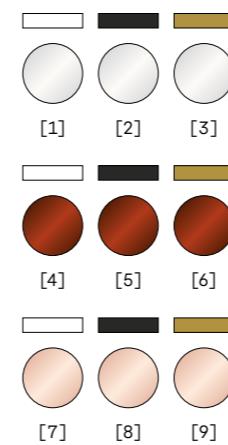


## AELLA T 54

<b>DIMENSIONS</b>	Diffuser: Ø54 cm (21 1/4"), H23,2 cm (9 1/4"). Base: Ø16,8 cm (6 1/2"), H25,9 cm (10 1/4"). Cable lenght: 200 cm (78 3/4").
<b>LIGHT SOURCE</b>	3000K, LED 1 X 26,6W, 4060 lm (nominal), CRI≥90. 2700K, LED 1 X 26,6W, 3808 lm (nominal), CRI≥90.
<b>US AND CANADA</b>	3000K, LED 1 X 26,6W, 4060 lm (nominal), CRI≥90. 2700K, LED 1 X 26,6W, 3808 lm (nominal), CRI≥90.
<b>NET WEIGHT</b>	16,45 kg (36,2 lbs).

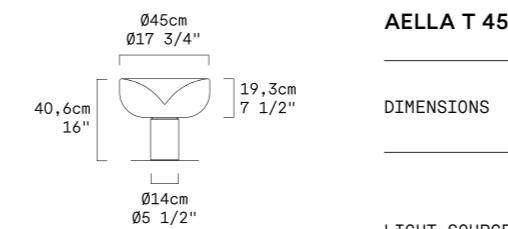


## AELLA T 45

<b>DIMENSIONS</b>	Diffuser: Ø45 cm (17 3/4"), H19,3 cm (7 1/2"). Base: Ø14 cm (5 1/2"), H21,3 cm (8 3/8"). Cable lenght: 200 cm (78 3/4").
<b>LIGHT SOURCE</b>	3000K, LED 1 X 16,6W, 2624 lm (nominal), CRI≥90. 2700K, LED 1 X 16,6W, 2461 lm (nominal), CRI≥90.
<b>US AND CANADA</b>	3000K, LED 1 X 14,2W, 2219 lm (nominal), CRI≥90. 2700K, LED 1 X 14,2W, 2118 lm (nominal), CRI≥90.
<b>NET WEIGHT</b>	8,3 kg (18,3 lbs).



## AELLA T 30

<b>DIMENSIONS</b>	Diffuser: Ø30 cm (11 3/4"), H12,9 cm (5 1/8"). Base: Ø10 cm (4"), H14,7 cm (5 1/8"). Cable lenght: 200 cm (78 3/4").
<b>LIGHT SOURCE</b>	3000K, LED 1 X 11,9W, 1635 lm (nominal), CRI≥90. 2700K, LED 1 X 11,9W, 1535 lm (nominal), CRI≥90.
<b>US AND CANADA</b>	3000K, LED 1 X 11,9W, 1635 lm (nominal), CRI≥90. 2700K, LED 1 X 11,9W, 1535 lm (nominal), CRI≥90.
<b>NET WEIGHT</b>	3,3 kg (7,3 lbs).



## AELLA S 30

<b>DIMENSIONS</b>	Diffuser: Ø30 cm (11 3/4"), H12,9 cm (5 1/8"). Canopy: Ø14,5 cm (5 3/4"), H4,6 cm (1 3/4"). Cable lenght: 300 cm (118 1/8").
<b>LIGHT SOURCE</b>	3000K, LED 1 X 11,9W, 1635 lm (nominal), CRI≥90. 2700K, LED 1 X 11,9W, 1535 lm (nominal), CRI≥90.
<b>US AND CANADA</b>	3000K, LED 1 X 11,9W, 1635 lm (nominal), CRI≥90. 2700K, LED 1 X 11,9W, 1535 lm (nominal), CRI≥90.
<b>NET WEIGHT</b>	3,7 kg (8,2 lbs).

# AELLA T OPENWORKED TABLE

## SPECIAL EDITION

### Designer

Toso & Massari, 2024.

### Category

Table, indoor.

### Materials

Diffuser: hand-blown glass.  
Structure: satin steel  
or matte white metal  
and copper rods.  
Base: borosilicate glass.

### Light source

Replaceable LED.

### Dimming protocol

Dimmer on cord.

### US AND CANADA

Dimmer on cord.

### Marks


  DRY LOCATION

### Notes

Personalized plaque on request.

### COLORS AND FINISHES

See p. 104.



## AELLA T 45 OPENWORKED

DIMENSIONS	Diffuser: Ø45 cm (17 3/4"), H19,3 cm (7 1/2"). Base: Ø15 cm (5 7/8"), H21,3 cm (8 3/8"). Cable length: 200 cm (78 3/4").
LIGHT SOURCE	3000K, LED 1 X 16,6W, 2556 lm (nominal), CRI≥90. 2700K, LED 1 X 16,6W, 2456 lm (nominal), CRI≥90.
NET WEIGHT	US AND CANADA 3000K, LED 1 X 14,2W, 2219 lm (nominal), CRI≥90. 2700K, 1 LED X 14,2W, 2118 lm (nominal), CRI≥90. 8 kg (17,7 lbs).



The transparent base reveals natural copper stems that oxidize over time, adding character to the piece.



Each Aella T 45 Openworked features a hand-blown glass diffuser with a unique white spot and is individually crafted, ensuring that no two pieces are identical.

# AELLA TR FLOOR

## Designer


Toso & Massari, 2024.

## Category

Floor, indoor.

## Materials

Diffuser: hand-blown glass.  
Structure: metal.



## AELLA TR 45

DIMENSIONS	Diffuser: Ø45 cm (17 3/4"), H19,3 cm (7 1/2"). Base: Ø32 cm (12 5/8"), H94,7 cm (37 1/4"). Cable length: 230 cm (90 1/2").
LIGHT SOURCE	3000K, LED 1 X 16,6W, 2624 lm (nominal), CRI≥90. 2700K, LED 1 X 16,6W, 2461 lm (nominal), CRI≥90.
NET WEIGHT	US AND CANADA 3000K, LED 1 X 14,2W, 2219 lm (nominal), CRI≥90. 2700K, LED 1 X 14,2W, 2118 lm (nominal), CRI≥90. 14,5 kg (32 lbs).

## Light source

Replaceable LED.

## Dimming protocol

Dimmer on cord.


### US AND CANADA

Dimmer on cord.


## Marks

  DRY LOCATION

## COLORS AND FINISHES



# Stacking

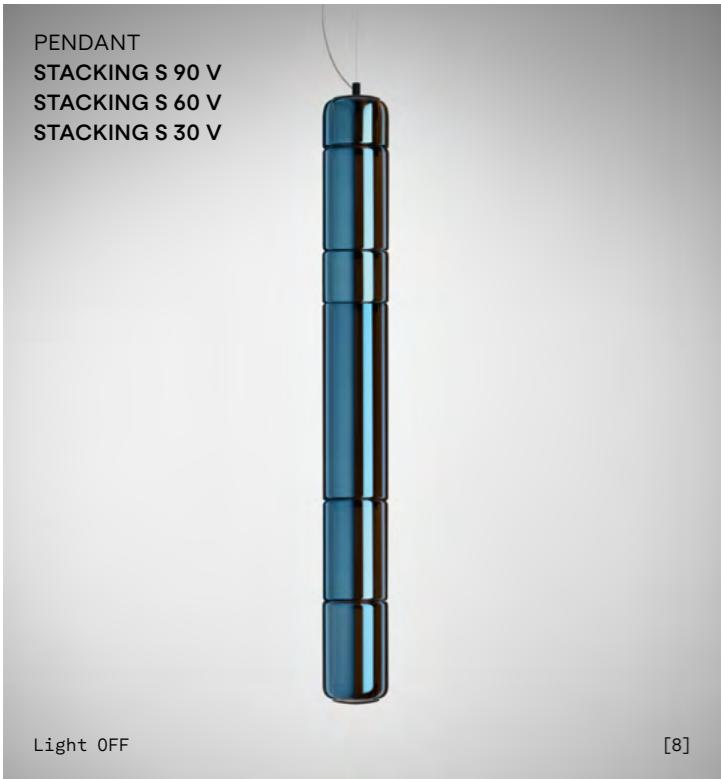


## COLORS AND FINISHES

### STANDARD

Metal structure

#### Transparent glass diffuser

SMOOTH



[1]

RIGADIN (RIG)




[3]

MILLERIGHE (MLR)



[5]

ANODIZED ALUMINUM



[2]



[4]




[6]

MATTE BLACK

#### ONLY ON REQUEST\*

#### PVD metalized glass diffuser

SMOOTH METALLIC  
PETROL BLUE



Light OFF

SMOOTH METALLIC  
TITANIUM



Light OFF



Light OFF



Light OFF

Stacking S 120 H representing colors and finishes for the complete Stacking collection (unless otherwise specified).

\*PVD metalized glass diffuser for smooth glass only.

## STACKING TR ONLY



Smoke grey, white, smoke grey, white, mirror, chrome structure.

[B]



Smoke grey, white, amber, tobacco, white, amber, gold structure.

[C]



White, gold, transparent tobacco, white, gold, black, gold structure.

[D]

# GLASS DIFFUSER ARRANGEMENT

## STACKING S/P-PL/T ONLY

■ Available    □ Only on request (minimum order quantity applies)    - Not available    AA Anodized Aluminum    MB Matte Black

### SMOOTH GLASS

Colors and finishes	TRANSPARENT		METALLIC PETROL BLUE		METALLIC TITANIUM	
Glass diffuser arrangement	Stacked modules	Single Glass (VU)	Stacked modules	Single Glass (VU)	Stacked modules	Single Glass (VU)
Metal structure	AA	MB	AA	MB	AA	MB
STACKING S 180 H	■	■	-	-	□	□
STACKING S 120 H	■	■	-	-	□	□
STACKING S 90 V	■	■	-	-	□	□
STACKING S 60 V	■	■	-	-	□	□
STACKING S 30 V	■	■	-	-	□	□
STACKING P-PL 60	■	■	-	-	□	□
STACKING P-PL 30	■	■	-	-	□	□
STACKING T 30X15 RIG	-	-	-	-	-	-

### RIGADIN GLASS (RIG)

Colors and finishes	TRANSPARENT		METALLIC PETROL BLUE		METALLIC TITANIUM	
Glass diffuser arrangement	Stacked modules	Single Glass (VU)	Stacked modules	Single Glass (VU)	Stacked modules	Single Glass (VU)
Metal structure	AA	MB	AA	MB	AA	MB
STACKING S 180 H	■	■	-	-	-	-
STACKING S 120 H	■	■	-	-	-	-
STACKING S 90 V	■	■	-	-	-	-
STACKING S 60 V	■	■	■	■	-	-
STACKING S 30 V	■	■	■	■	-	-
STACKING P-PL 60	■	■	■	■	-	-
STACKING P-PL 30	■	■	■	■	-	-
STACKING T 30X15 RIG	-	-	-	■	-	-

### MILLERIGHE GLASS (MLR)

Colors and finishes	TRANSPARENT		METALLIC PETROL BLUE		METALLIC TITANIUM	
Glass diffuser arrangement	Stacked modules	Single Glass (VU)	Stacked modules	Single Glass (VU)	Stacked modules	Single Glass (VU)
Metal structure	AA	MB	AA	MB	AA	MB
STACKING S 180 H	■	■	-	-	-	-
STACKING S 120 H	■	■	-	-	-	-
STACKING S 90 V	■	■	-	-	-	-
STACKING S 60 V	■	■	■	■	-	-
STACKING S 30 V	■	■	■	■	-	-
STACKING P-PL 60	■	■	■	■	-	-
STACKING P-PL 30	■	■	■	■	-	-
STACKING T 30X15 RIG	-	-	-	-	-	-

## SAMPLE GALLERY



# CANOPY SYSTEMS

## STACKING S ONLY

### EXAMPLES OF COMPOSITIONS

CEILING  
ROUND CLUSTER CANOPY 55



Example of composition

The new LEUCOS ceiling canopies are designed to support multi-light compositions, allowing multiple pendant elements to be suspended from a single power source—transforming light into a sculptural and architectural feature.

Available in two versions—Round Cluster Canopy 55 ( $\varnothing 55$  cm) and Radial Cluster Canopy 33 ( $\varnothing 33$  cm)—they are made of matte white metal and designed for customized lighting arrangements.

With the new LEUCOS canopies, up to 12 pendant elements can be combined, including Stacking in vertical and horizontal configurations, creating dynamic compositions of light and volume that enhance and personalize any space.

The round canopy gathers suspension lights around a central point, generating a cascade of light that amplifies their three-dimensional impact. In contrast, the radial canopy, with its fan-like structure, distributes the pendants outward, resulting in a more airy and dynamic effect.


CEILING  
RADIAL CLUSTER CANOPY 33





Example of composition

Both versions are compatible with Push-dim, 0/1-10V, and DALI control systems (US and Canada 0/1-10V only) for Stacking suspensions with integrated LED light sources, ensuring advanced and flexible lighting management.

ROUND CLUSTER CANOPY 55

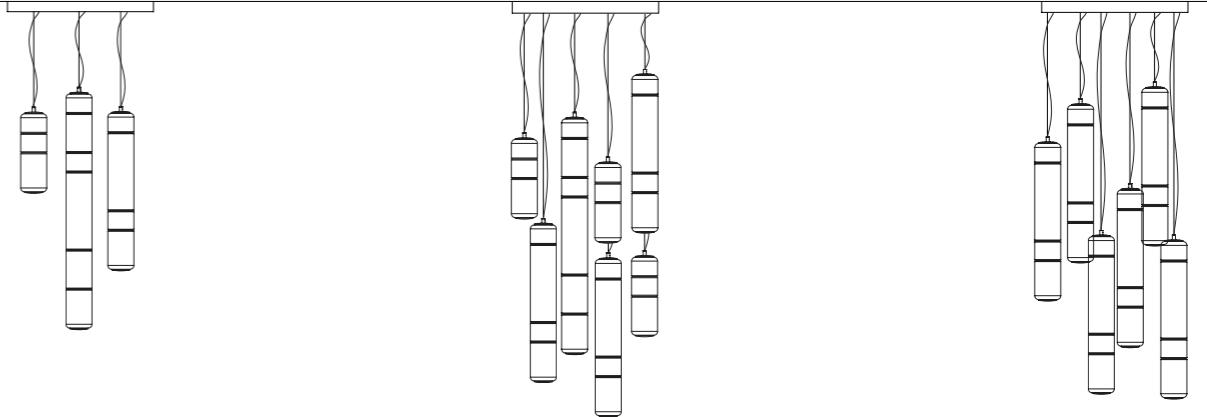

RADIAL CLUSTER CANOPY 33

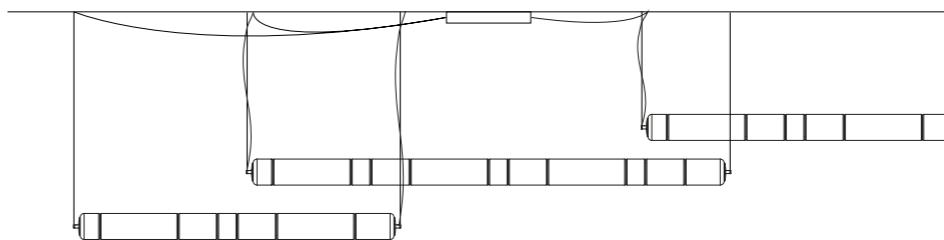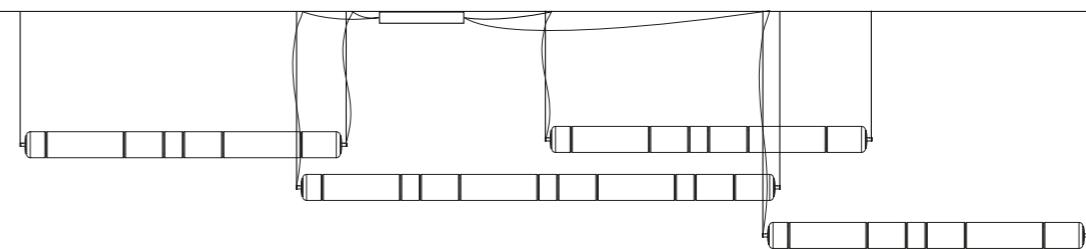


# CLUSTER CANOPY CEILING

## NOVELTIES

### Designer

LEUCOS Design, 2025.



### Category

Ceiling, indoor.

### Materials

Structure: metal.

### Dimming protocol

On-off.  
Push-dim; 0/1-10V; Dali.

### US AND CANADA

On-off.  
0/1-10V.

### Marks



### Notes

Driver included.

### COLORS AND FINISHES



## ROUND CLUSTER CANOPY 55

DIMENSIONS	Ø55 cm (21 5/8"), H6 cm (2 3/8").	
Up to 12 pendant elements equally distributed (STACKING S V only).		
Max. weight of installable fixtures: 30 kg.		
Max. wattage: 24Vdc, 135W.		
CONFIGURATION	US AND CANADA	
Up to 12 pendant elements equally distributed (STACKING S V only).		
Max. weight of installable fixtures: 66 lbs.		
Max. wattage: 24V, 86,5W+86,5W (173W) (On-Off), 54W+54W (108W) (0/1-10V).		
NET WEIGHT	10 kg (22 lbs).	

DIMMING PROTOCOL	DRIVER QUANTITY (INCLUDED)	WATT
Push-dim; 0/1-10V; Dali.	1	135W
On-off	1	135W

US AND CANADA	DRIVER QUANTITY (INCLUDED)	WATT
0/1-10V	2*	54W+54W (108W)
On-off	2*	86,5W+86,5W (173W)

\*Each driver works separately.

## RADIAL CLUSTER CANOPY 33

DIMENSIONS	Ø33 cm (12"), H5,7 cm (2 1/4").	
Up to 12 pendant elements (STACKING S H and V).		
Max. wattage: 24Vdc, 135W.		
CONFIGURATION	US AND CANADA	
Up to 12 pendant elements (STACKING S H and V).		
Max. wattage: 24V, 86,5W+86,5W (173W) (On-Off), 54W+54W (108W) (0/1-10V).		
NET WEIGHT	4,6 kg (10 lbs).	
DIMMING PROTOCOL	DRIVER QUANTITY (INCLUDED)	WATT
Push-dim; 0/1-10V; Dali.	1	135W
On-off	1	135W

US AND CANADA	DRIVER QUANTITY (INCLUDED)	WATT
0/1-10V	2*	54W+54W (108W)
On-off	2*	86,5W+86,5W (173W)

\*Each driver works separately.

# STACKING S H PENDANT

## Designer

David Rockwell, 2023.

## Category

Pendant, indoor.

## Materials

Diffuser: smooth borosilicate glass.  
Structure: aluminum.


## STACKING S 180 H

Diffuser: Ø10 cm (4"), L180 cm (70 7/8").

Canopy: 40 cm X 7 cm X 4 cm (15 3/4" X 2 3/4" X 1 5/8").  
Cable length: 300 cm (118 1/8").

3000K, 5XLED STRIP 24V 43,75W (total), 5031 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 43,75W (total), 4812 lm (nominal), CRI≥90.

NET WEIGHT 10 kg (22 lbs).

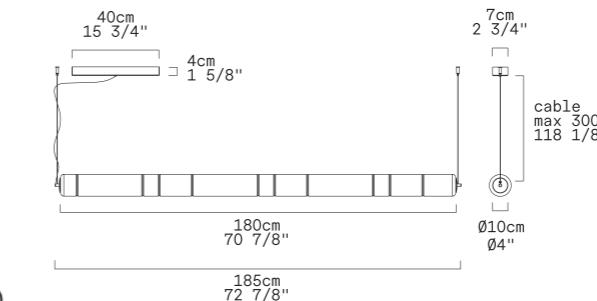

## Light source

Replaceable LED.


## Dimming protocol

Push-dim; 0/1-10V; Dali.

## US AND CANADA

0/1-10V; Phase Cut.

## Marks



## Notes


Class 3 version installation with remote driver available on request (supplied without canopy and driver).

## STACKING S 120 H

Diffuser: Ø10 cm (4"), L120 cm (47 1/4").  
Canopy: 40 cm X 7 cm X 4 cm (15 3/4" X 2 3/4" X 1 5/8").  
Cable length: 300 cm (118 1/8").

3000K, 5XLED STRIP 24V 28,75W (total), 3306 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 28,75W (total), 3162 lm (nominal), CRI≥90.

NET WEIGHT 5,6 kg (12,35 lbs).

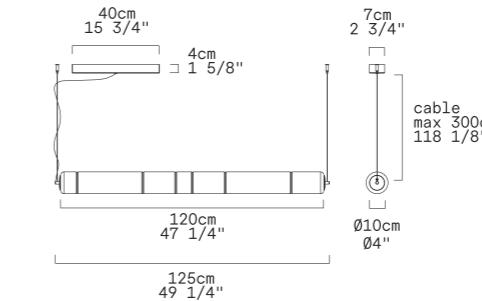


## Accessories


Radial Cluster Canopy 33.

Learn more at p. 116-118.

## STANDARD COLORS AND FINISHES



## COLORS AND FINISHES ONLY ON REQUEST\*



## CANOPY



\*Minimum order quantity applies.

# STACKING S H RIG/MLR PENDANT

## UPGRADED

### Designer

David Rockwell, 2024, 2025.

### Category

Pendant, indoor.

### Materials

Diffuser: rigadin or millerighe borosilicate glass.  
Structure: aluminum.

### Light source

Replaceable LED.

### Dimming protocol

Push-dim; 0/1-10V; Dali.

### US AND CANADA

0/1-10V; Phase Cut.

### Marks



### Notes


Class 3 version installation with remote driver available on request (supplied without canopy and driver).

### Accessories

Radial Cluster Canopy 33.

Learn more at p. 116-118.

## STANDARD COLORS AND FINISHES



### CANOPY




## STACKING S 180 H RIG/MLR

**DIMENSIONS**  
Diffuser: Ø10 cm (4"), L180 cm (70 7/8").  
Canopy: 40 cm X 7 cm X 4 cm (15 3/4" X 2 3/4" X 1 5/8").  
Cable lenght: 300 cm (118 1/8").

**LIGHT SOURCE**  
3000K, 5XLED STRIP 24V 43,75W (total), 5031 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 43,75W (total), 4812 lm (nominal), CRI≥90.

**US AND CANADA**  
3000K, 5XLED STRIP 43,75W (total), 3830 lm (delivered), CRI≥90.  
2700K, 5XLED STRIP 43,75W (total), 3539 lm (delivered), CRI≥90.

**NET WEIGHT**  
12,3 kg (27,1 lbs).

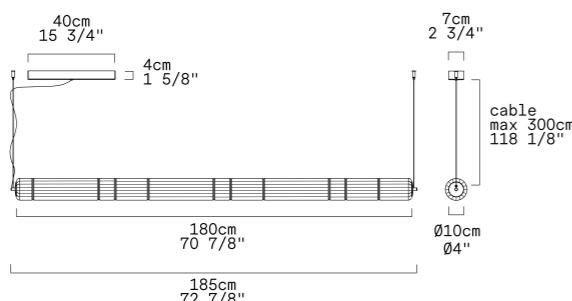


## STACKING S 120 H RIG/MLR

**DIMENSIONS**  
Diffuser: Ø10 cm (4"), L120 cm (47 1/4").  
Canopy: 40 cm X 7 cm X 4 cm (15 3/4" X 2 3/4" X 1 5/8").  
Cable lenght: 300 cm (118 1/8").

**LIGHT SOURCE**  
3000K, 5XLED STRIP 24V 28,75W (total), 3306 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 28,75W (total), 3162 lm (nominal), CRI≥90.  
**US AND CANADA**  
3000K, 5XLED STRIP 28,75W (total), 2523 lm (delivered), CRI≥90.  
2700K, 5XLED STRIP 28,75W (total), 2472 lm (delivered), CRI≥90.

**NET WEIGHT**  
7,1 kg (15,65 lbs).

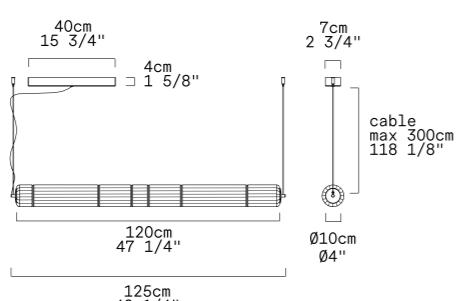

# STACKING S V PENDANT

## Designer

David Rockwell, 2023.

## Category

Pendant, indoor.

## Materials

Diffuser: smooth borosilicate glass.  
Structure: aluminum.

## Light source

Replaceable LED.


## Dimming protocol

Push-dim; 0/1-10V; Dali.

## US AND CANADA

0/1-10V; Phase Cut.

## Marks



## Notes


Class 3 version installation with remote driver available on request (supplied without canopy and driver).

## Accessories


Round Cluster Canopy 55,  
Radial Cluster Canopy 33.

Learn more at p. 116-118.


## STANDARD COLORS AND FINISHES



## COLORS AND FINISHES ONLY ON REQUEST\*



## CANOPY

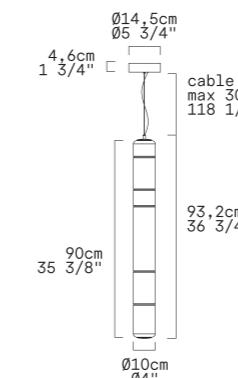


## STACKING S 90 V

**DIMENSIONS**  
Diffuser: Ø10 cm (4"), H90 cm (35 3/8").  
Canopy: Ø14,5 cm (5 3/4"), H4,6 cm (1 3/4").  
Cable lenght: 300 cm (118 1/8").

**LIGHT SOURCE**  
3000K, 5XLED STRIP 24V 21,25W (total), 2443 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 21,25W (total), 2337 lm (nominal), CRI≥90.

**US AND CANADA**  
3000K, 5XLED STRIP 21,25W (total), 1895 lm (delivered), CRI≥90.  
2700K, 5XLED STRIP 21,25W (total), 1857 lm (delivered), CRI≥90.

**NET WEIGHT**  
4,3 kg (9,5 lbs).




## STACKING S 60 V

**DIMENSIONS**  
Diffuser: Ø10 cm (4"), H60 cm (23 5/8").  
Canopy: Ø14,5 cm (5 3/4"), H4,6 cm (1 3/4").  
Cable lenght: 300 cm (118 1/8").

**LIGHT SOURCE**  
3000K, 5XLED STRIP 24V 13,75W (total), 1581 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 13,75W (total), 1512 lm (nominal), CRI≥90.

**US AND CANADA**  
3000K, 5XLED STRIP 13,75W (total), 1218 lm (delivered), CRI≥90.  
2700K, 5XLED STRIP 13,75W (total), 1186 lm (delivered), CRI≥90.

**NET WEIGHT**  
3,2 kg (7 lbs).



## STACKING S 30 V

**DIMENSIONS**  
Diffuser: Ø10 cm (4"), H30 cm (11 3/4").  
Canopy: Ø14,5 cm (5 3/4"), H4,6 cm (1 3/4").  
Cable lenght: 300 cm (118 1/8").

**LIGHT SOURCE**  
3000K, 5XLED STRIP 24V 6,25W (total), 718 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 6,25W (total), 687 lm (nominal), CRI≥90.

**US AND CANADA**  
3000K, 5XLED STRIP 6,25W (total), 541 lm (delivered), CRI≥90.  
2700K, 5XLED STRIP 6,25W (total), 530 lm (delivered), CRI≥90.

**NET WEIGHT**  
2,3 kg (5 lbs).

\*Minimum order quantity applies.

# STACKING S V RIG/MLR PENDANT

## UPGRADED

### Designer

David Rockwell, 2024, 2025.

### Category

Pendant, indoor.

### Materials

Diffuser: rigadin or millerighe borosilicate glass.  
Structure: aluminum.

### Light source

Replaceable LED.

### Dimming protocol

Push-dim; 0/1-10V; Dali.

### US AND CANADA

0/1-10V; Phase Cut.

### Marks

  DRY LOCATION 

### Notes

Class 3 version installation with remote driver available on request (supplied without canopy and driver).

### Accessories

Round Cluster Canopy 55,  
Radial Cluster Canopy 33.


Learn more at p. 116-118.

### GLASS DIFFUSER ARRANGEMENT


Single glass version (VU) available (not for STACKING S 90 V RIG/MLR).

Learn more at p. 114-115.

### STANDARD COLORS AND FINISHES



### CANOPY

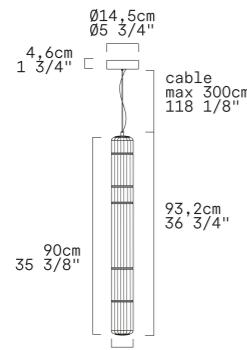

## STACKING S 90 V RIG/MLR

### DIMENSIONS

Diffuser: Ø10 cm (4"), H90 cm (35 3/8").  
Canopy: Ø14,5 cm (5 3/4"), H4,6 cm (1 3/4").  
Cable length: 300 cm (118 1/8").

3000K, 5XLED STRIP 24V 21,25W (total), 2443 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 21,25W (total), 2337 lm (nominal), CRI≥90.

### US AND CANADA

3000K, 5XLED STRIP 21,25W (total), 1895 lm (delivered), CRI≥90.  
2700K, 5XLED STRIP 21,25W (total), 1857 lm (delivered), CRI≥90.

### LIGHT SOURCE

5,4 kg (12 lbs).

## STACKING S 60 V RIG/MLR/RIG VU/MLR VU

### DIMENSIONS

Diffuser: Ø10 cm (4"), H60 cm (23 5/8").  
Canopy: Ø14,5 cm (5 3/4"), H4,6 cm (1 3/4").  
Cable length: 300 cm (118 1/8").

3000K, 5XLED STRIP 24V 13,75W (total), 1581 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 13,75W (total), 1512 lm (nominal), CRI≥90.

### US AND CANADA

3000K, 5XLED STRIP 13,75W (total), 1218 lm (delivered), CRI≥90.  
2700K, 5XLED STRIP 13,75W (total), 1186 lm (delivered), CRI≥90.

### LIGHT SOURCE

3,9 kg (8,6 lbs).  
Single glass version (VU): 3,2 kg (7 lbs).

## STACKING S 30 V RIG/MLR/RIG VU/MLR VU

### DIMENSIONS

Diffuser: Ø10 cm (4"), H30 cm (11 3/4").  
Canopy: Ø14,5 cm (5 3/4"), H4,6 cm (1 3/4").  
Cable length: 300 cm (118 1/8").

3000K, 5XLED STRIP 24V 6,25W (total), 718 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 6,25W (total), 687 lm (nominal), CRI≥90.

### US AND CANADA

3000K, 5XLED STRIP 6,25W (total), 541 lm (delivered), CRI≥90.  
2700K, 5XLED STRIP 6,25W (total), 530 lm (delivered), CRI≥90.

### LIGHT SOURCE

2,7 kg (6 lbs).  
Single glass version (VU): 2,7 kg (6 lbs).

# STACKING P-PL WALL AND CEILING

## NOVELTIES

### Designer

David Rockwell, 2025.

### Category

Wall and ceiling, indoor.

### Materials

Diffuser: smooth borosilicate glass.  
Structure: aluminum.

### Light source

Replaceable LED.

### Dimming protocol

Push-dim; Dali.

### US AND CANADA

0/1-10V; Phase Cut.


### Marks

  DRY LOCATION 


### Notes

Can be installed vertically and horizontally.


### STANDARD COLORS AND FINISHES



### COLORS AND FINISHES ONLY ON REQUEST\*



\*Minimum order quantity applies.



## STACKING P-PL 60

### DIMENSIONS

Diffuser: Ø10 cm (4"), H62 cm (24 3/8").  
Depth: 14 cm (5 1/2").


3000K, 5XLED STRIP 24V 13,75W (total), 1581 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 13,75W (total), 1512 lm (nominal), CRI≥90.

### LIGHT SOURCE

US AND CANADA  
3000K, 5XLED STRIP 13,75W (total), 1581 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 13,75W (total), 1512 lm (nominal), CRI≥90.

### NET WEIGHT

3 kg (6,6 lbs).



## STACKING P-PL 30

### DIMENSIONS

Diffuser: Ø10 cm (4"), H32 cm (12 5/8").  
Depth: 14 cm (5 1/2").


3000K, 5XLED STRIP 24V 6,25W (total), 718 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 6,25W (total), 687 lm (nominal), CRI≥90.

### LIGHT SOURCE

US AND CANADA  
3000K, 5XLED STRIP 6,25W (total), 718 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 6,25W (total), 687 lm (nominal), CRI≥90.

### NET WEIGHT

1,9 kg (4,2 lbs).



## STACKING S 30 V RIG/MLR/RIG VU/MLR VU

### DIMENSIONS

Diffuser: Ø10 cm (4"), H30 cm (11 3/4").  
Canopy: Ø14,5 cm (5 3/4"), H4,6 cm (1 3/4").  
Cable length: 300 cm (118 1/8").

3000K, 5XLED STRIP 24V 6,25W (total), 718 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 6,25W (total), 687 lm (nominal), CRI≥90.

### LIGHT SOURCE


2,7 kg (6 lbs).  
Single glass version (VU): 2,7 kg (6 lbs).

# STACKING P-PL RIG/MLR WALL AND CEILING

## NOVELTIES

### Designer

David Rockwell, 2025.



### STACKING P-PL 60 RIG/MLR/RIG VU/MLR VU

#### DIMENSIONS

Diffuser: Ø10 cm (4"), H62 cm (24 3/8").  
Depth: 14 cm (5 1/2").

3000K, 5XLED STRIP 24V 13,75W (total), 1581 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 13,75W (total), 1512 lm (nominal), CRI≥90.

#### LIGHT SOURCE

##### US AND CANADA


3000K, 5XLED STRIP 13,75W (total), 1218 lm (delivered), CRI≥90.  
2700K, 5XLED STRIP 13,75W (total), 1186 lm (delivered), CRI≥90.

#### NET WEIGHT

Rigadin glass diffuser version (RIG): 3,5 kg (7,7 lbs).  
Millerighe glass diffuser version (MLR): 3,1 kg (6,85 lbs).

### Light source

Replaceable LED.



### STACKING P-PL 30 RIG/MLR/RIG VU/MLR VU

#### DIMENSIONS

Diffuser: Ø10 cm (4"), H32 cm (12 5/8").  
Depth: 14 cm (5 1/2").

3000K, 5XLED STRIP 24V 6,25W (total), 718 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 6,25W (total), 687 lm (nominal), CRI≥90.

#### LIGHT SOURCE

##### US AND CANADA

3000K, 5XLED STRIP 6,25W (total), 718 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 6,25W (total), 687 lm (nominal), CRI≥90.

#### NET WEIGHT

Rigadin glass diffuser version (RIG): 2,25 kg (5 lbs).  
Millerighe glass diffuser version (MLR): 2 kg (4,4 lbs).

### Marks

DRY LOCATION

### Notes


Can be installed vertically and horizontally.

## GLASS DIFFUSER ARRANGEMENT

Single glass version (VU) available.

Learn more at p. 114-115.

## STANDARD COLORS AND FINISHES




# STACKING T TABLE

## NOVELTIES

### Designer

David Rockwell, 2025.



### STACKING T 30X15 RIG

#### DIMENSIONS

Diffuser: Ø15 cm (5 7/8"), H34,2 cm (13 1/2").  
Cable lenght: 200 cm (78 3/4").

3000K, 5XLED STRIP 24V 10W (total), 718 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 10W (total), 687 lm (nominal), CRI≥90.

#### LIGHT SOURCE

##### US AND CANADA

3000K, 5XLED STRIP 24V 10W (total), 718 lm (nominal), CRI≥90.  
2700K, 5XLED STRIP 24V 10W (total), 687 lm (nominal), CRI≥90.

#### NET WEIGHT

4 kg (8,8 lbs).

### Light source

Replaceable LED.

### Dimming protocol

Dimmer on cord.

### US AND CANADA

Dimmer on cord.

### Marks

DRY LOCATION

## STANDARD COLORS AND FINISHES




[4]

# STACKING TR FLOOR

## Designer

Rockwell Group, 2007.



## Category

Floor, indoor.

## Materials


Diffuser: hand-blown glass.  
Structure: metal.

## Light source

GU10 Retrofit LED bulb  
(not included).

## US AND CANADA

GU10 Retrofit LED bulb  
(not included).



## Dimming protocol


Dimmer on cord.

## US AND CANADA

On-off.

## Marks

DRY LOCATION



## COLORS AND FINISHES

See p. 112-113.

## STACKING B TR

**DIMENSIONS** Diffuser: Ø23 cm (9"), H115 cm (45 1/4").  
Cable lenght: 220 cm (86 5/8").

**LIGHT SOURCE** 4 X 7W GU10 Retrofit LED bulb.  
**US AND CANADA** 4 X 7W GU10 Retrofit LED bulb.

**NET WEIGHT** 29 kg (64 lbs).

## STACKING C TR

**DIMENSIONS** Diffuser: Ø23 cm (9"), H163 cm (64 1/4").  
Cable lenght: 220 cm (86 5/8").

**LIGHT SOURCE** 4 X 7W GU10 Retrofit LED bulb.  
**US AND CANADA** 4 X 7W GU10 Retrofit LED bulb.

**NET WEIGHT** 36,7 kg (81 lbs).

## STACKING D TR

**DIMENSIONS** Diffuser: Ø23 cm (9"), H148 cm (58 1/4").  
Cable lenght: 220 cm (86 5/8").


**LIGHT SOURCE** 4 X 7W GU10 Retrofit LED bulb.  
**US AND CANADA** 4 X 7W GU10 Retrofit LED bulb.

**NET WEIGHT** 30,2 kg (66,7 lbs).

# Aurelia




[1]

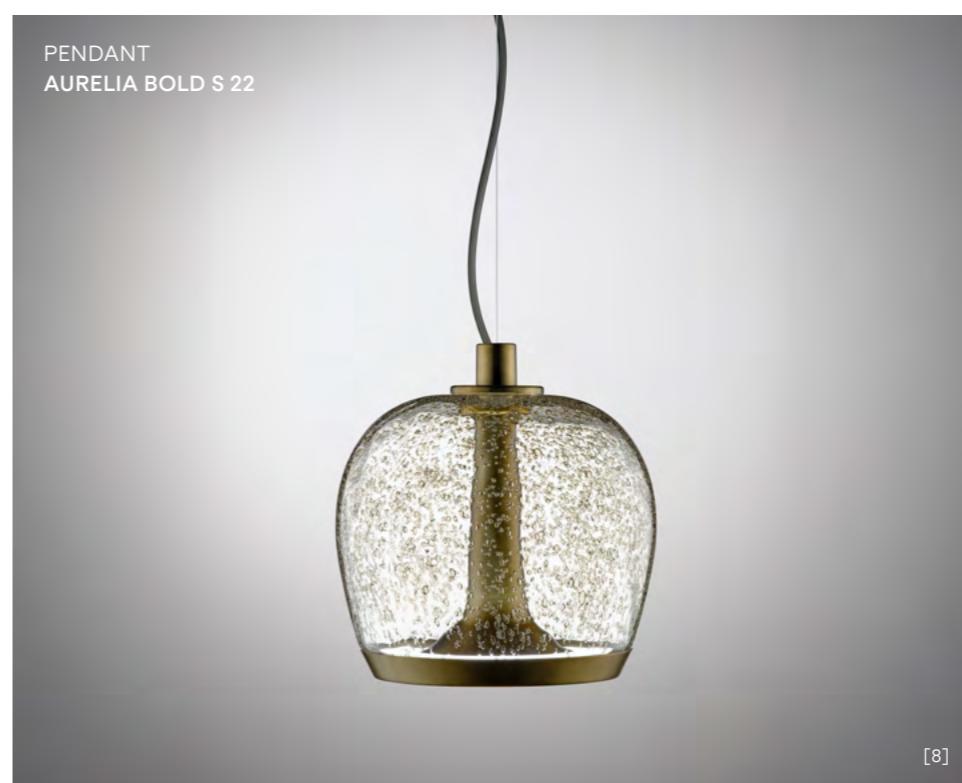

[8]

## COLORS AND FINISHES

Glass diffuser

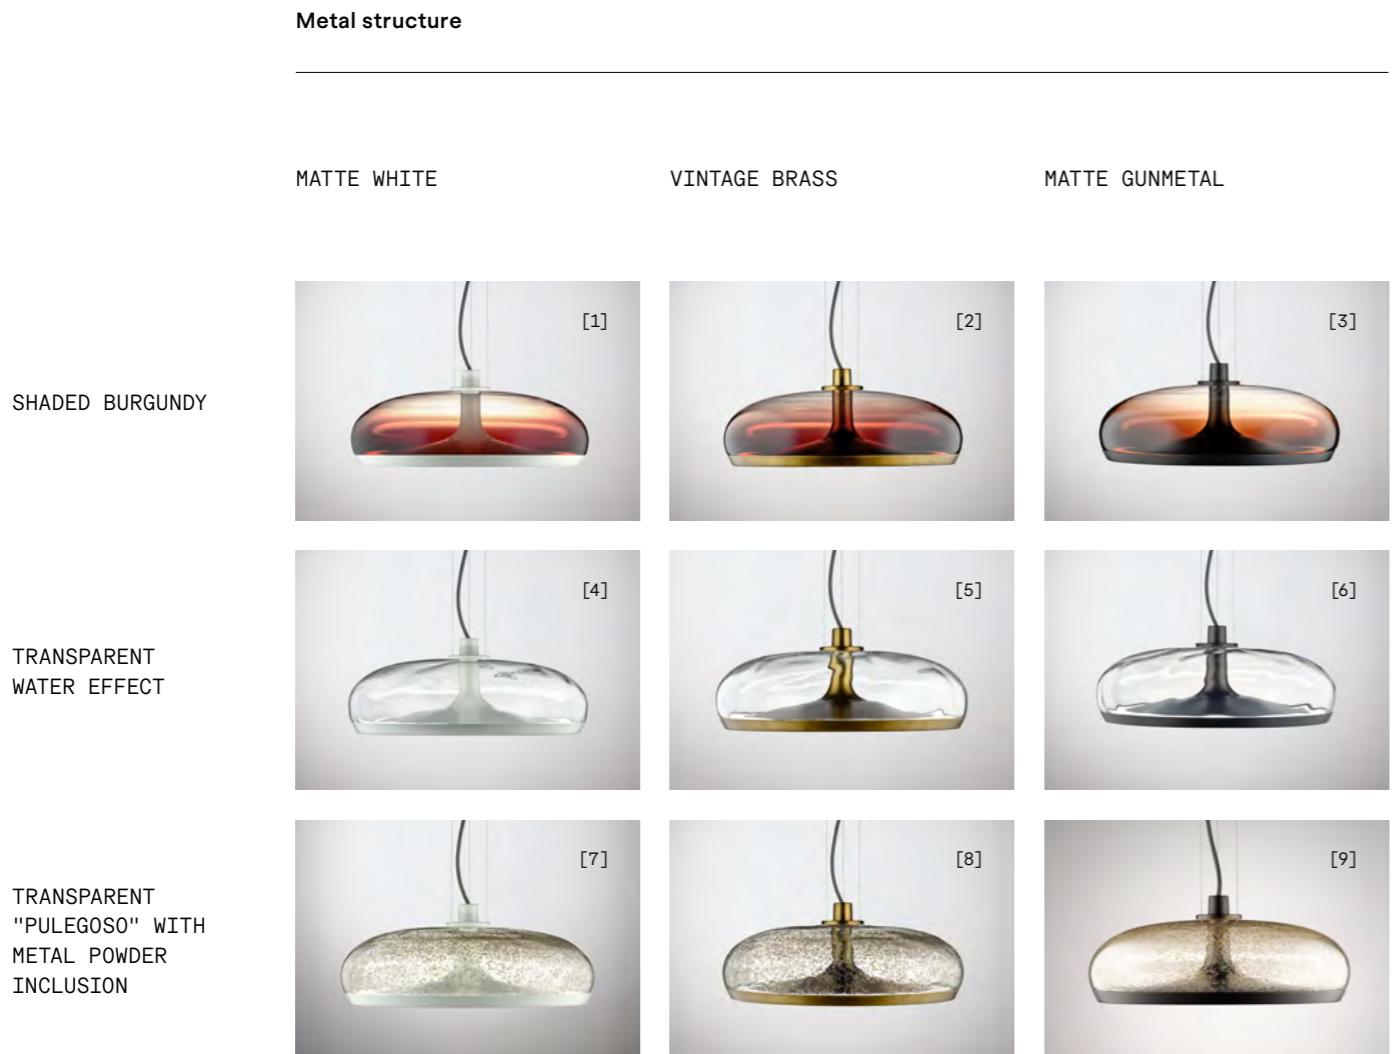

Aurelia S 45 representing colors and finishes for the complete Aurelia collection (unless otherwise specified).

# AURELIA S SS/BOLD S SS PENDANT

## Designer

Patrick Jouin, 2021.

## Category

Pendant, indoor.

## Materials

Diffuser: hand-blown glass.  
Structure: metal.

## Light source

Single-switch (SS)  
double-emission  
replaceable LED.

## Dimming protocol

Push-dim; 0/1-10V; Dali.

## US AND CANADA

Push-dim; 0/1-10V; Dali.


## Marks



## Notes


Class 3 version installation  
with remote driver available  
on request (supplied without  
canopy and driver).

## COLORS AND FINISHES

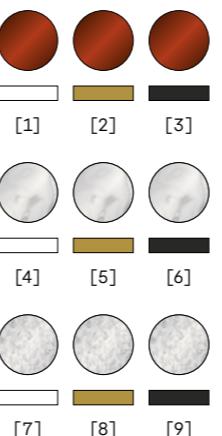

## Canopy

Same color and finish  
as the structure.



## AURELIA S 45 SS


**DIMENSIONS**  
Diffuser: Ø45 cm (17 3/4"), H14 cm (5 1/2").  
Canopy: Ø18 cm (7"), H4,9 cm (2").  
Cable lenght: 300 cm (118 1/8").

**Light source**  
Direct emission:  
3000K, LED 1X 11,6W, 1531 lm (nominal), CRI≥90.  
2700K, LED 1X 11,6W, 1471 lm (nominal), CRI≥90.

Indirect emission:  
3000K, LED 1X 14,4W, 2450 lm (nominal), CRI≥90.  
2700K, LED 1X 14,4W, 2360 lm (nominal), CRI≥90.

**US AND CANADA**  
Direct emission:  
3000K, LED 1X 11,6W, 1531 lm (nominal), CRI≥90.  
2700K, LED 1X 11,6W, 1471 lm (nominal), CRI≥90.  
Indirect emission:  
3000K, LED 1X 14,4W, 2450 lm (nominal), CRI≥90.  
2700K, LED 1X 14,4W, 2360 lm (nominal), CRI≥90.

**NET WEIGHT** 9,3 kg (20,5 lbs).



## AURELIA BOLD S 22 SS

**DIMENSIONS**  
Diffuser: Ø22,5 cm (8 3/4"), H20,5 cm (8").  
Canopy: Ø18 cm (7"), H4,9 cm (2").  
Cable lenght: 300 cm (118 1/8").

**Light source**  
Direct emission:  
3000K, LED 1X 11,6W, 1531 lm (nominal), CRI≥90.  
2700K, LED 1X 11,6W, 1471 lm (nominal), CRI≥90.

Indirect emission:  
3000K, LED 1X 5,8W, 980 lm (nominal), CRI≥90.  
2700K, LED 1X 5,8W, 944 lm (nominal), CRI≥90.

**US AND CANADA**  
Direct emission:  
3000K, LED 1X 11,6W, 1531 lm (nominal), CRI≥90.  
2700K, LED 1X 11,6W, 1471 lm (nominal), CRI≥90.  
Indirect emission:  
3000K, LED 1X 5,8W, 980 lm (nominal), CRI≥90.  
2700K, LED 1X 5,8W, 944 lm (nominal), CRI≥90.

**NET WEIGHT** 3,5 kg (7,7 lbs).








# Ether

## CASCADING VERSIONS ETHER S SQ ONLY



Ether S 150 SQ representing cascading versions for the complete Ether S SQ collection (unless otherwise specified).

## EXAMPLES OF COMPOSITIONS

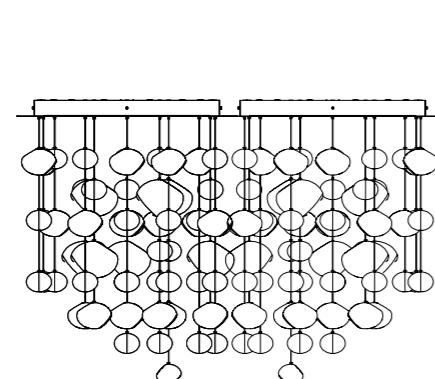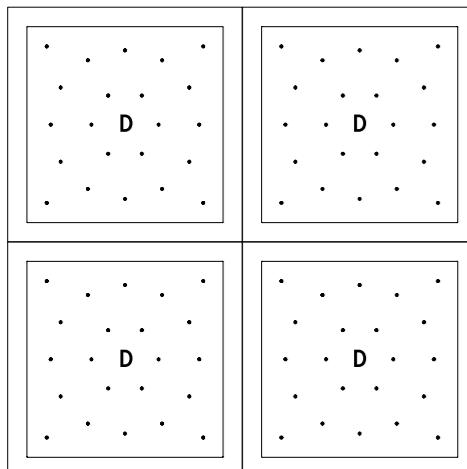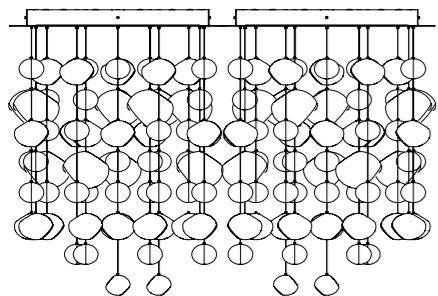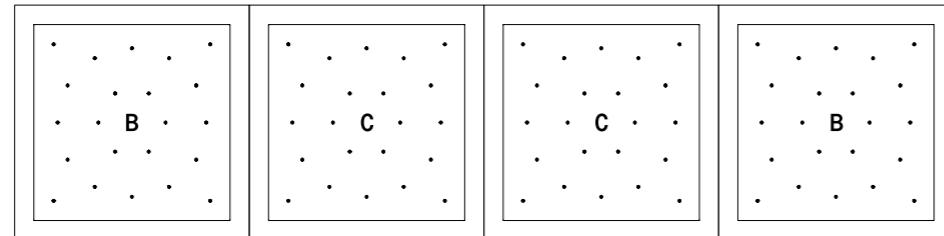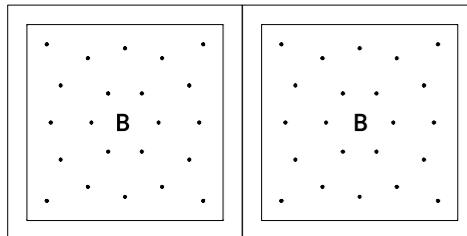

# ETHER S RD PENDANT

## UPGRADED

### Designer

Patrick Jouin, 2006, 2025.

### Category

Pendant, indoor.

### Materials

Diffuser: blown borosilicate glass.  
Structure: metal.

### Light source

Replaceable LED.


### Dimming protocol

Push-dim; 0/1-10V; Dali.

### US AND CANADA

0/1-10V; Phase Cut.

### Marks




### Notes

Custom sizes and special versions available on request.

### COLORS AND FINISHES

Transparent glass diffuser,  
matte white metal structure.

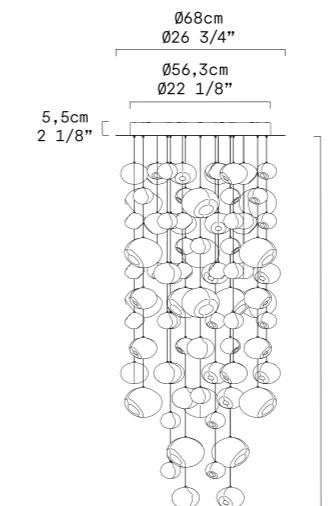

## ETHER S 150 RD

### DIMENSIONS

Diffuser: Ø68 cm (26 3/4"), H150 cm (59").  
Canopy: Ø56,3 cm (22 1/8"), H5,5 cm (2 1/8").

3000K, LED 5 X 8,7W (43,5W total), 5725lm (nominal),  
CRI≥90.  
2700K, LED 5 X 8,7W (43,5W total), 5380lm (nominal),  
CRI≥90.

### LIGHT SOURCE

US AND CANADA  
3000K, LED 5 X 8,7W (43,5W total), 5725lm (nominal),  
CRI≥90.  
2700K, LED 5 X 8,7W (43,5W total), 5380lm (nominal),  
CRI≥90.

### NET WEIGHT

23 kg (51 lbs).

## ETHER S 90 RD

### DIMENSIONS

Diffuser: Ø68 cm (26 3/4"), H87 cm (34 1/4").  
Canopy: Ø56,3 cm (22 1/8"), H5,5 cm (2 1/8").


3000K, LED 5 X 8,7W (43,5W total), 5725lm (nominal),  
CRI≥90.  
2700K, LED 5 X 8,7W (43,5W total), 5380lm (nominal),  
CRI≥90.

### LIGHT SOURCE

US AND CANADA  
3000K, LED 5 X 8,7W (43,5W total), 5725lm (nominal),  
CRI≥90.  
2700K, LED 5 X 8,7W (43,5W total), 5380lm (nominal),  
CRI≥90.

### NET WEIGHT

18 kg (40 lbs).



## ETHER S RD

### DIMENSIONS

Diffuser: Ø48,5 cm (19 1/8"), H87 cm (34 1/4").  
Canopy: Ø40 cm (15 3/4"), H5,5 cm (2 1/8").


3000K, LED 3 X 8,7 W (26,1W total), 3435lm (nominal),  
CRI≥90.  
2700K, LED 3 X 8,7 W (26,1W total), 3228lm (nominal),  
CRI≥90.

### LIGHT SOURCE

US AND CANADA  
3000K, LED 3 X 8,7 W (26,1W total), 3435lm (nominal),  
CRI≥90.  
2700K, LED 3 X 8,7 W (26,1W total), 3228lm (nominal),  
CRI≥90.

### NET WEIGHT

10 kg (22,2 lbs).

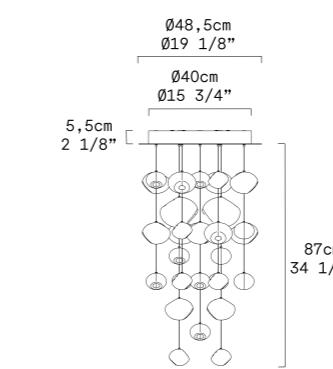

# ETHER S SQ PENDANT

## NOVELTIES

### Designer

Patrick Jouin, 2025.

### Category


Pendant, indoor.

### Materials

Diffuser: blown  
borosilicate glass.  
Structure: metal.

### Light source

Replaceable LED.

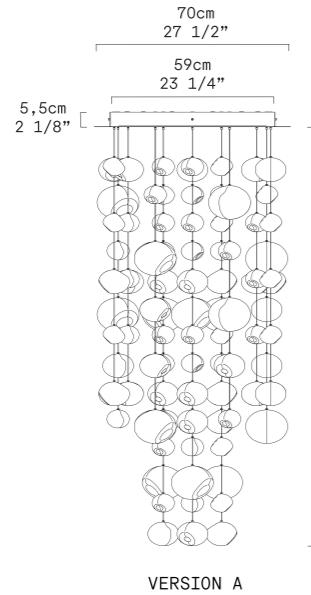

VERSION A

## ETHER S 150 SQ VERSION A/B/C/D

### DIMENSIONS

Diffuser: 70 cm X 70 cm (27 1/2" X 27 1/2"), H150 cm (59").  
Structure: 59 cm X 59 cm (23 1/4" X 23 1/4"), H5,5 cm (2 1/8").

### LIGHT SOURCE

3000K, LED 4 X 8,7W (34,8W total), 4580lm (nominal),  
CRI≥90.

2700K, LED 4 X 8,7W (34,8W total), 4304lm (nominal),  
CRI≥90.

### US AND CANADA

3000K, LED 4 X 8,7W (34,8W total), 4580lm (nominal),  
CRI≥90.

2700K, LED 4 X 8,7W (34,8W total), 4304lm (nominal),  
CRI≥90.

### NET WEIGHT

30 kg (66 lbs).


## DIMMING PROTOCOL

Push-dim; 0/1-10V; Dali.

### US AND CANADA


0/1-10V; Phase Cut.

### Marks



### Notes

Custom sizes and special  
versions available on request.

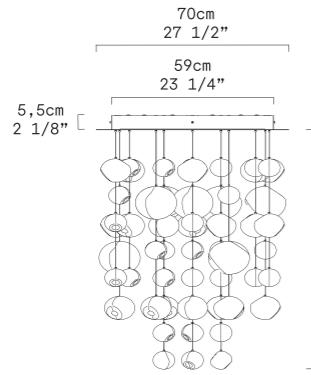

VERSION A

## ETHER S 90 SQ VERSION A/B/C/D

### DIMENSIONS

Diffuser: 70 cm X 70 cm (27 1/2" X 27 1/2"), H87 cm (34 1/4").  
Structure: 59 cm X 59 cm (23 1/4" X 23 1/4"), H5,5 cm (2 1/8").

### LIGHT SOURCE

3000K, LED 4 X 8,7W (34,8W total), 4580lm (nominal),  
CRI≥90.

2700K, LED 4 X 8,7W (34,8W total), 4304lm (nominal),  
CRI≥90.

### US AND CANADA

3000K, LED 4 X 8,7W (34,8W total), 4580lm (nominal),  
CRI≥90.

2700K, LED 4 X 8,7W (34,8W total), 4304lm (nominal),  
CRI≥90.

### NET WEIGHT

25 kg (55 lbs).

## CASCADING VERSIONS

Four different versions available.

Learn more at p. 131-132.

## COLORS AND FINISHES

Transparent glass diffuser,  
matte white metal structure.

( GENERAL INFO )

LEUCOS reserves the right to modify, at any time without notice, the technical and aesthetic characteristics of the elements presented in this catalog.

The colors shown in the catalog are for reference only. Regardless of patent protection, the designs and patterns produced by LEUCOS and featured in this catalog are protected by copyright. The registered trademarks mentioned in the catalog are the exclusive property of their respective owners. All technical details referring to the wattage of Retrofit LED sources are for guidance only. Due to the ever-changing technological advancements, LEUCOS reserves the right to update both the list of available products and their technical specifications.

It is forbidden to reproduce any part  
of this catalog. Printed in Italy.  
Edition: January 2026.



( GENERAL INFO )

LEUCOS reserves the right to modify, at any time, the technical characteristics and aesthetic characteristics of the elements.

The colors shown in the catalog are for reference only. LEUCOS reserves the right to modify the designs and patterns produced by LEUCOS, in accordance with the laws of copyright. The registered trademarks mentioned in the catalog are the property of their respective owners. All technical data and dimensions shown in the catalog are for guidance only. Due to the evolution of the products, the data shown in the catalog is not binding. LEUCOS reserves the right to update both the technical data and the aesthetic characteristics of the products. LEUCOS reserves the right to update both the technical data and the aesthetic characteristics of the products.

**Evolution of a classic.**

It is forbidden to reproduce any part of this catalog. Printed in Italy.  
Edition: January 2026.

LEUCOS Design, 2005-2021.

PENDANT  
GRIP  
WALL  
FLOOR

**JJ GREAT**  
Pendant, indoor.  
Metal canopy and diffuser  
with matte white painted finishing.



**Large-scale, matte-lacquered aluminum floor lamp. Available in two color options with an outdoor-grade finish for maximum UV protection on both outdoor and indoor versions.**



**JJ GREAT**  
Floor, indoor.  
Metal structure, diffuser and base with matte black painted finishing.



**JJ GREAT**  
Floor, outdoor.  
Metal structure, diffuser and base with custom color painted finishing.

The newest size and typology in the JJ Family. An adjustable grip lamp that can be oriented in all directions. The new JJ BIG – Grip allows different applications (table, floor, wall, or ceiling) thanks to the included Super Clamp, an attachment that enables the lamp to be fixed to a wide range

of locations with either round or rectilinear profiles, and to compatible design accessories such as the Autopole (an extendable floor-to-ceiling tension column in anodized aluminum) and the Grip Mount (a wall/ceiling attachment in polished anodized aluminum).



**JJ BIG**  
**Grip, outdoor.**  
Metal diffuser with matte black painted finishing.



**JJ BIG**  
**Grip, indoor.**  
Metal diffuser with matte white painted finishing.

**AUTOPOLE**  
**Mounting accessory, indoor.**  
Anodized aluminum.



**JJ BIG**  
**Pendant, indoor.**  
Metal canopy and diffuser  
with matte black painted finishing.



**JJ BIG**  
**Floor, indoor or outdoor.**  
Metal structure, diffuser and base  
with custom color painted finishing.

**JJ MID****Wall, indoor.**Metal structure and diffuser  
with matte black painted finishing.**JJ MID****Floor, indoor.**Metal structure, diffuser  
and base with matte white  
painted finishing.

Floor lamp in matte-lacquered steel  
with an aluminum diffuser. Adjustable  
arms and diffuser.

## COLORS AND FINISHES



Metal structure and diffuser

MATTE BLACK

MATTE WHITE



## MOUNTING ACCESSORIES JJ BIG GRIP ONLY



# JJ GREAT/JJ BIG PENDANT

**Designer**  
LEUCOS Design, 2005, 2020.

**Category**  
Pendant, indoor.

**Materials**  
Aluminum.

**Light source**  
Replaceable LED.

**Dimming protocol**  
Push-dim; 0/1-10V; Dali.

**US AND CANADA**  
Push-dim; 0/1-10V.

**Marks**  
  DRY LOCATION 


**COLORS AND FINISHES**

 MATTE WHITE

 MATTE BLACK

**Canopy**

Same color and finish as the lamp.

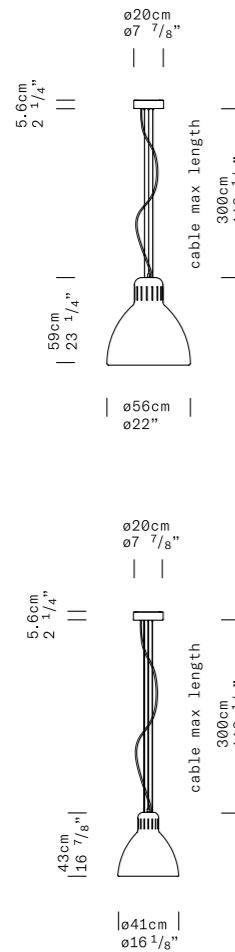

## JJ GREAT PENDANT

<b>DIMENSIONS</b>	Diffuser: Ø56 cm (22"), H59cm (23 1/4"). Canopy: Ø20 cm (7 7/8"), H5,6 cm (2 1/4"). Cable lenght: 300 cm (118 1/8").
<b>LIGHT SOURCE</b>	3000K, LED 1 X 45W, 6691lm (nominal), CRI≥90. 2700K, LED 1 X 45W, 6433lm (nominal), CRI≥90.
<b>US AND CANADA</b>	3000K, LED 1 X 37W, 5623lm (nominal), CRI≥90. 2700K, LED 1 X 37W, 5405lm (nominal), CRI≥90.
<b>NET WEIGHT</b>	7 kg (15,5 lbs).

## JJ BIG PENDANT

<b>DIMENSIONS</b>	Diffuser: Ø41 cm (16 1/8"), H43cm (16 7/8"). Canopy: Ø20 cm (7 7/8"), H5,6 cm (2 1/4"). Cable lenght: 300 cm (118 1/8").
<b>LIGHT SOURCE</b>	3000K, LED 1 X 45W, 6691lm (nominal), CRI≥90. 2700K, LED 1 X 45W, 6433lm (nominal), CRI≥90.
<b>US AND CANADA</b>	3000K, LED 1 X 37W, 5623lm (nominal), CRI≥90. 2700K, LED 1 X 37W, 5405lm (nominal), CRI≥90.
<b>NET WEIGHT</b>	6 kg (13,2 lbs).

# JJ BIG GRIP

**Designer**  
LEUCOS Design, 2021.

**Category**  
Grip, indoor and outdoor.

**Materials**  
Aluminum.

**Light source**  
Replaceable LED.

**Dimming protocol Indoor**

Dimmer on cord.

**US AND CANADA**  
Dimmer on cord.

**Dimming protocol Outdoor**

Wireless CASAMBI® Smart Lighting Control.

**US AND CANADA**  
Wireless CASAMBI® Smart Lighting Control.

**Marks Indoor**

  DRY LOCATION

**Marks Outdoor**

  DAMP LOCATION

  WET LOCATION

**Notes**

Super clamp width (round tube):  
minimum Ø1,3 cm (Ø0 1/2"),  
maximum Ø5,5 cm (Ø2 1/8").  
Can also be used on flat surfaces.

**Indoor mounting accessories**

Grip Mount, Autopole.


**COLORS AND FINISHES**

 MATTE WHITE

 MATTE BLACK


**SUPER CLAMP**

 ANODIZED ALUMINUM



## JJ BIG GRIP INDOOR/OUTDOOR

<b>DIMENSIONS</b>	Diffuser: Ø41 cm (16 1/8"), H43cm (16 7/8"). Cable lenght: 500 cm (196 7/8") + push dimmer 150 cm (59").
<b>LIGHT SOURCE</b>	3000K, LED 1 X 45W, 6691lm (nominal), CRI≥90. 2700K, LED 1 X 45W, 6433lm (nominal), CRI≥90.
<b>US AND CANADA</b>	3000K, LED 1 X 37W, 5623lm (nominal), CRI≥90.

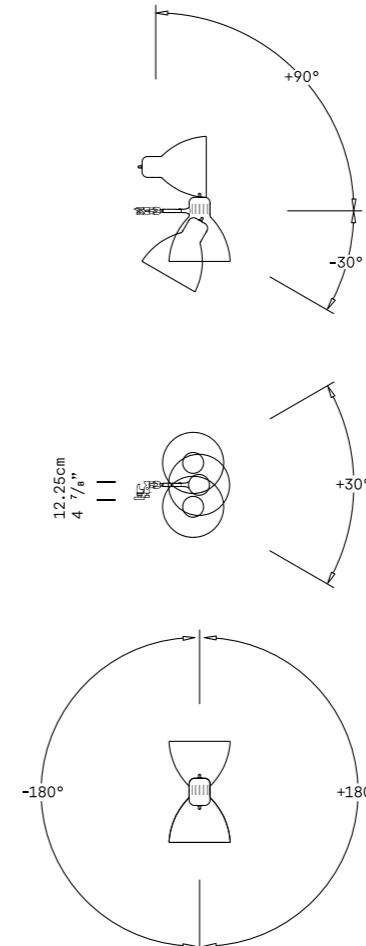

# JJ MID WALL

## Designer

LEUCOS Design, 2021.

## Category

Wall, indoor.

## Materials

Steel, aluminum diffuser.

## Light source

E27 Retrofit LED bulb (not included) or replaceable LED.

## US AND CANADA

Replaceable LED.

## Dimming protocol

E27 version: on-off (on diffuser).

LED version: touch dimmer (on diffuser).

## US AND CANADA

Touch dimmer (on diffuser).

## Marks

  DRY LOCATION


## COLORS AND FINISHES

 MATTE WHITE

 MATTE BLACK

## Wall bracket

Same color and finish as the lamp.

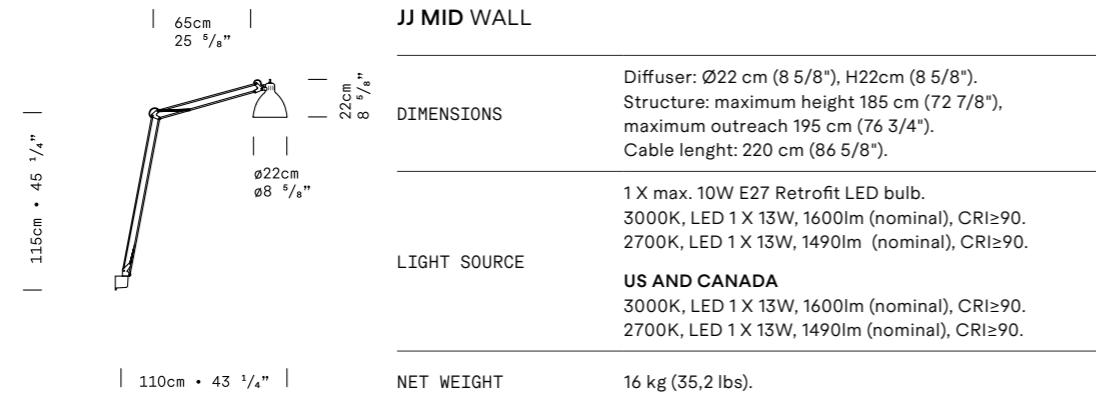

# JJ GREAT/JJ BIG FLOOR

## Designer

LEUCOS Design, 2005, 2020.

## Category

Floor, indoor and outdoor.

## Materials

Aluminum, steel base.

## Light source

User replaceable LED.

## Dimming protocol Indoor

Dimmer on cord.  
Wireless CASAMBI® Smart Lighting Control.

## US AND CANADA

Dimmer on cord.  
Wireless CASAMBI® Smart Lighting Control.

## Dimming protocol Outdoor

Wireless CASAMBI® Smart Lighting Control.

## US AND CANADA

Wireless CASAMBI® Smart Lighting Control.

## Marks Indoor

  DRY LOCATION

## Marks Outdoor

  DAMP LOCATION  
 WET LOCATION

## Notes

Custom color and finish available on request.

## COLORS AND FINISHES

 MATTE WHITE

 MATTE BLACK

## JJ GREAT FLOOR INDOOR/OUTDOOR

LEUCOS Design, 2005, 2020.

## DIMENSIONS

Diffuser: Ø56 cm (22"), H59cm (23 1/4"). Base: Ø74 cm (29 1/8").  
Structure: maximum height 420 cm (165 3/8"), maximum outreach 385 cm (151 3/8").  
Cable lenght: indoor 350 cm (137 3/4"), outdoor 300 cm (118 1/8").

## LIGHT SOURCE


3000K, LED 1 X 45W, 6691lm (nominal), CRI≥90.  
2700K, LED 1 X 45W, 6433lm (nominal), CRI≥90.

## US AND CANADA

3000K, LED 1 X 37W, 5623lm (nominal), CRI≥90.

## NET WEIGHT

160 kg (353 lbs).

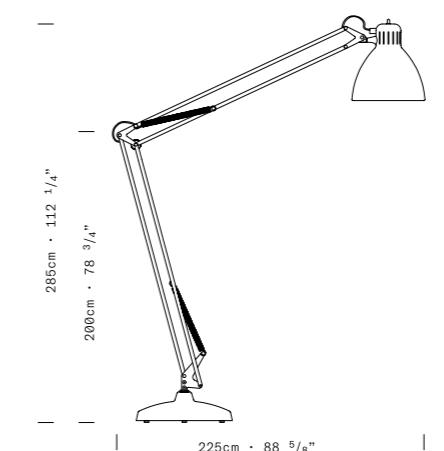

## JJ BIG FLOOR INDOOR/OUTDOOR

Diffuser: Ø41 cm (16 1/8"), H43cm (16 7/8"). Base: Ø54 cm (21 1/4").  
Structure: maximum height 315 cm (124"), maximum outreach 295 cm (115 3/4").  
Cable lenght: indoor 350 cm (137 3/4"), outdoor 300 cm (118 1/8").

## LIGHT SOURCE


3000K, LED 1 X 45W, 6691lm (nominal), CRI≥90.  
2700K, LED 1 X 45W, 6433lm (nominal), CRI≥90.

## US AND CANADA

3000K, LED 1 X 37W, 5623lm (nominal), CRI≥90.

## NET WEIGHT

73 kg (161 lbs).



# JJ MID FLOOR

## Designer

LEUCOS Design, 2021.

## Category

Floor, indoor.

## Materials

Steel, aluminum diffuser and base.

## Light source

E27 Retrofit LED bulb (not included) or replaceable LED.

## US AND CANADA

Replaceable LED.

## Dimming protocol

E27 version: on-off (on diffuser).

LED version: touch dimmer (on diffuser).

## US AND CANADA

Touch dimmer (on diffuser).


## Marks

  DRY LOCATION

## COLORS AND FINISHES

 MATTE WHITE

 MATTE BLACK

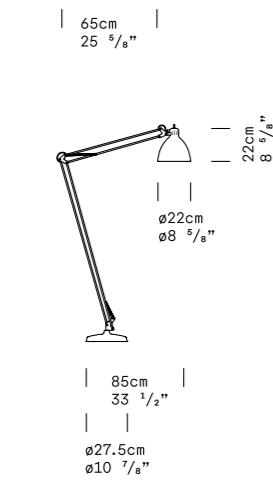

## JJ MID FLOOR

### DIMENSIONS

Diffuser: Ø22 cm (8 5/8"), H22cm (8 5/8").  
Base: Ø27,5 cm (10 7/8").  
Structure: maximum height 185 cm (72 7/8"),  
maximum outreach 135 cm (53 1/8").  
Cable lenght: 220 cm (86 5/8").

### LIGHT SOURCE



1 X max. 10W E27 Retrofit LED bulb.  
3000K, LED 1 X 13W, 1600lm (nominal), CRI≥90.  
2700K, LED 1 X 13W, 1490lm (nominal), CRI≥90.

### US AND CANADA

3000K, LED 1 X 13W, 1600lm (nominal), CRI≥90.  
2700K, LED 1 X 13W, 1490lm (nominal), CRI≥90.

### NET WEIGHT

16 kg (35,2 lbs).



LEUCOS  
CATALOG  
2026

YOU  
SPOT IT  
FROM AFAR

leucos.com



**LEUCOS S.r.l.**

Via del Commercio, 22  
36060 Romano d'Ezzelino VI  
Italy

+39 041 5741 111  
info.it@leucos.com

**LEUCOS USA Inc.**

6 Kilmer Rd Suite B  
Edison, NJ 08817  
United States of America

**WAREHOUSE**  
2351 Us Highway 130 Ste B  
Dayton, NJ 08810-1648  
United States of America

+1 732 225-0010  
info.us@leucos.com

**leucos.com**

[Download Catalog](#)

